
EMAS ELEKTROTEKNİK MAKİNA SANAYİ VE TİCARET A.Ş

Ziya Gökalp Mah. İkitelli Organize Sanayi Bölgesi
Atatürk Bulvarı No:50 34490 Başakşehir / İstanbul / TÜRKİYE
Telefon : +90 212 549 22 52
Faks : +90 212 549 25 80
Web : www.emasas.com.tr

Technical Specifications : B102DK

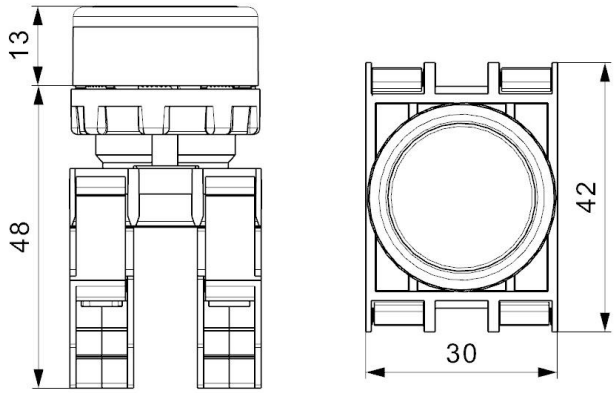

Order Code:

B102DK

Contact Block:

1NO + 1NC

Terminals with finger protection.
Fireproof plastic contact block body.
Sequential connectable body and contact blocks after lego magic.
Protective cable inlet tips enabling maximum safety.
Screw Washers.

Technical Information :

Body:
Plastic Body.
Opportunity of positioning with plates and Badge Bases.

General Specifications

Operating Temparature	-5/+40°C
Mechanical life	0,5 Million (3000 open-close/hour
Electrical Life	0,1 Million (1800 open-close/hour)
C.Block Tightening Torque	0,6-0,8 Nm
C.Block Connection Wire Profile	Min: 1x0,5 mm'2
Wire Profile	Max: 2x2,5 mm'2
Protection Degree	IP50

Standards:

- TS EN 60947 -5-1

In contact Blocks;

- VDE 0660
- UL 508

Electrical Informations :

General Specifications

Range Of Use		AC15
Operating Voltage	Ue	250V AC
Freggquency	f	50Hz
Operating Current	Ie	4A
Insulation Resistance	Ui	300V
Stroke Resistance Voltage	Uimp	2.5kV
Dielectrical Strength		1500V AC