
115.111.129.98KH..-PPLinear-Kugellager


Linear ball bearings KH08-PP (Series KH..-PP)

with initial greasing, sealed on both sides, with relubrication facility

The datasheet is only an overview of dimensions and basic load ratings of the selected product. Please always observe all the guidelines in these overview pages. Further information is given on many products under the menu item "Description". You can also order comprehensive information via the Catalogue ordering system (https://www.schaeffler.de/content.schaeffler.de/en/news_media/index.jsp) or by telephone on +49 (91 32) 82 - 28 97.

F_w	8	mm	
D	15	mm	
L	24	mm	
			Shaft diameter dLw, Fase x dLw <= 10: x = 1 tolerance +1 10 < dLw <= 30: x = 1,5 tolerance +1 30 < dLw <= 80: x = 2,5 tolerance +1
J_{L4}	6	mm	
N_2	2	mm	
			Supplied with initial greasing (sealed on both sides)
m	12	g	Mass of bearing
			The basic load ratings are valid only for hardened (650 HV + 165 HV) and ground shaft raceways.
C_{min}	410	N	Basic dynamic load rating
$C_{0\ min}$	280	N	Basic static load rating
C_{max}	475	N	Basic dynamic load rating
$C_{0\ max}$	400	N	Basic static load rating
			Designs with anti-corrosion protection have the suffix -RR.

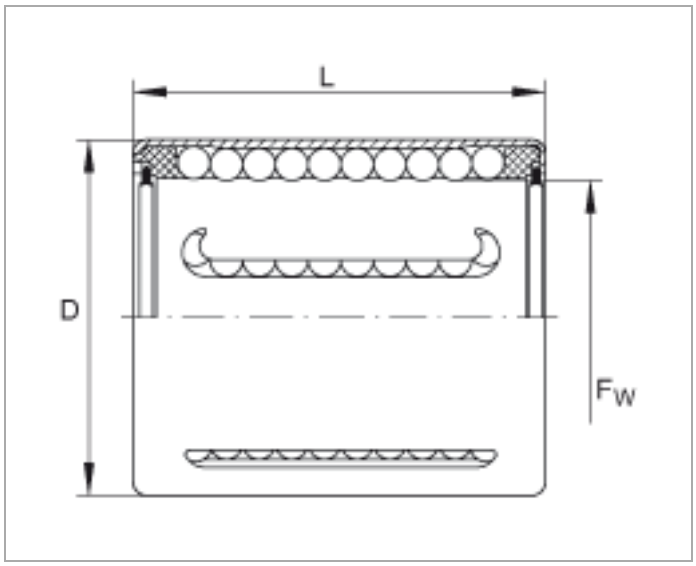

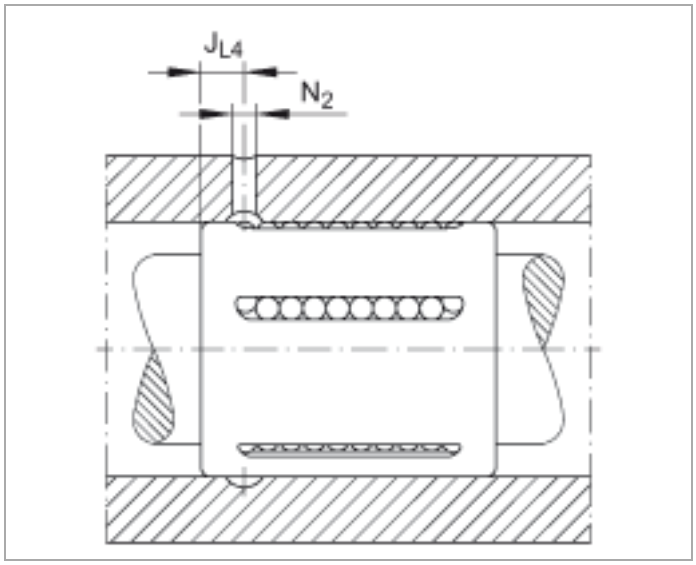

Mounting dimensions