

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.


LOC	DIST
FT	10


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	REV PER EC 0G3B–0317–03	24APR03	VF	GS

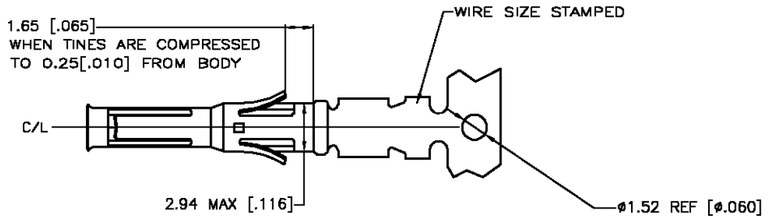


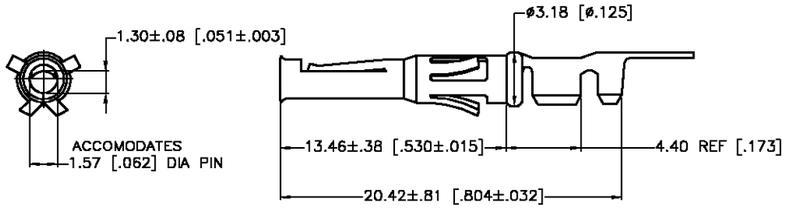

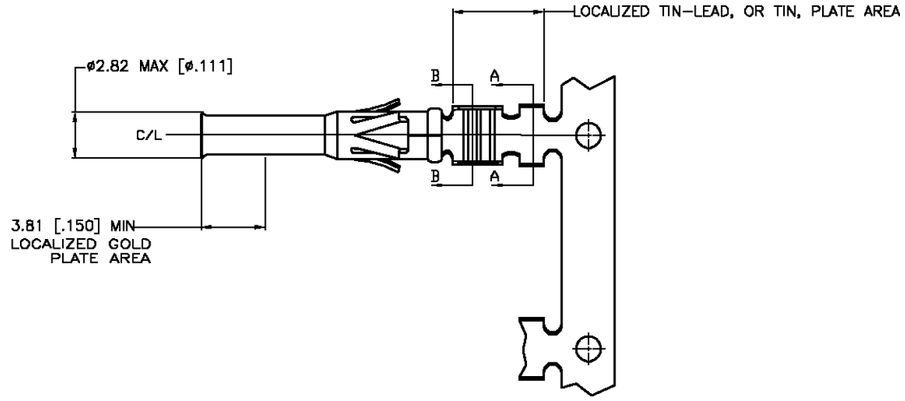

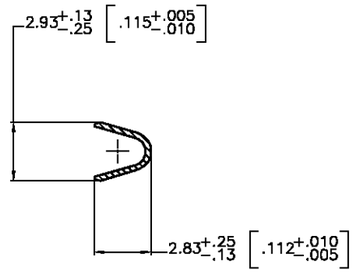

SECTION B–B



SECTION A–A

	DESCRIPTION	FINISH	
	REVERSE REELED FOR MINI–APPLICATOR	7	66580–7
	REVERSE REELED FOR MINI–APPLICATOR	4	66580–4
OBSOLETE	–	4	66580–3
	REVERSE REELED FOR MINI–APPLICATOR	5	66580–2
	–	5	66580–1

1. WIRE RANGE 18–16 AWG.
2. INSULATION RANGE 2.54–2.03[100–.080] DIA.
3. FOR LOOSE PIECE PART SEE DWG 66590.
4. 0.76µm [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA, 1.27µm [.000050] MIN TIN–LEAD IN LOCALIZED TIN–LEAD PLATE AREA, BOTH OVER 1.27µm [.000050] MIN NICKEL.
5. TIN PLATED.
6. GOLD PLATING PER MIL–G–45204, TIN PER MIL–T–10727 AND NICKEL PER QQ–N–290.
7. 0.76µm [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA, 1.27µm [.000050] MIN TIN IN LOCALIZED TIN PLATE AREA, BOTH OVER 1.27µm [.000050] MIN NICKEL.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± 0.13 [.005]
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL: BRASS MIL–C–50

FINISH: SEE TABLE 6

DWN V. FURLER 14MAY2003
CHK G. STEINHAUER 16MAY03
APVD G. STEINHAUER 16MAY03
PRODUCT SPEC –
APPLICATION SPEC –
WEIGHT –

Tyco Electronics Corporation
Harrisburg, PA 17105

NAME
CONTACT, SOCKET, STRIP,
TYPE VI, MULTIMATE
–

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C–66580	–

CUSTOMER DRAWING

SCALE	SHEET	REV
8:5	1 OF 1	B

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:
66580-2