
Radial Lead Fuses

TE5 > Time-Lag Fuse > 392 Series

392 Series, TE5 Time-Lag Fuse

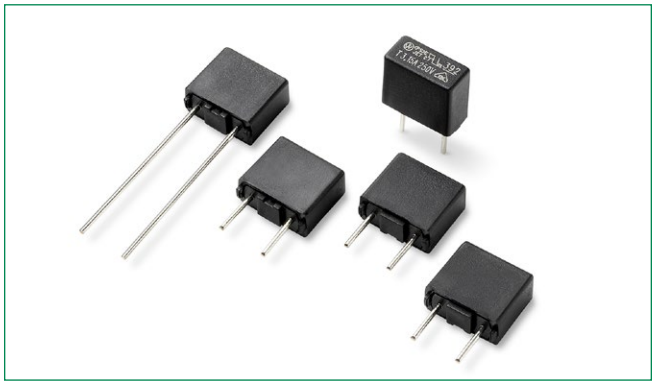

Description

The 392 Series is a TE5 Fuse. It is a time-lag fuse designed in accordance to IEC 60127-3, Standard Sheet 4.

Features

- Reduced PCB space requirements
- Direct solderable or plug-in versions
- Internationally approved
- Low internal resistance
- Shock safe casing
- Vibration resistant
- Halogen free, Lead-free and RoHS compliant
- Red Phosphorus Free
- Conforms to EN/IEC/J/K 60127-1 and EN/IEC/J/K 60127-3
- Conforms to GB/T 9364.1 and GB/T 9364.3
- Recognized to UL/CSA/NMX 248-1 and UL/CSA/NMX 248-14

Agency Approvals

Agency	Agency File Number	Ampere Range
VDE	126983	0.28A - 6.3A*
c UL us	E67006	0.28A - 6.3A
CE	N/A	0.28A - 6.3A
PS E	JET1896-31007-2002	1A - 5A
CCC	2020970207000069	0.5A - 6.3A
KC	SU05024 - 7013A SU05024 - 7014B SU05024 - 7015B SU05024 - 7016B SU05024 - 7017B SU05024 - 7018B	0.8A 1A - 2.5A 3.15A 4A 5A 6.3A

*Red Phosphorus Free from 0.28A to 5A.

Applications

- Battery Chargers
- Consumer Electronics
- Power supplies
- Industrial Controllers
- Chargers

Electrical Characteristics for Series

% of Ampere Rating	Opening Time
150%	1 Hour, **Min.**
210%	120 s, **Max.**
275%	400 ms **Min.** ; 10 Sec. **Max.**
400%	150 ms **Min.** ; 3 Sec. **Max.**
1000%	20 ms **Min.** ; 150 ms **Max.**

Additional Information

Datasheet | **Resources** | **Samples**

Electrical Characteristic Specifications by Item

Rated Current	Amp Code	Voltage Rating	Breaking Capacity	Nominal Cold Resistance (Ohms)[1]	Voltage Drop 1.0xI_N max. (mV)	Power Dissipation 1.5xI_N max. (mW)	Melting Integral 10xI_N max. (A^2s)	Agency Approvals					
								VDE	c UL us	PS E	CCC	KC	CE
280 mA	280	250V	35A@250Vac[1] 130A@250Vac[2]	0.33	115	168	0.048	x	x	-	-	-	x
500 mA	500	250V		0.163	105	125	2.175	x	x	-	x	x	x
800 mA	800	250V		0.096	110	280	5.12	x	x	-	x	x	x
1.0 A	1100	250V		0.0715	115	400	8.0	x	x	x	x	x	x
1.25 A	1125	250V		0.0569	100	500	11.95	x	x	x	x	x	x
1.6 A	1160	250V		0.04	95	600	18.43	x	x	x	x	x	x
2.0 A	1200	250V		0.0298	90	700	29.0	x	x	x	x	x	x
2.5 A	1250	250V		0.024	85	750	47.81	x	x	x	x	x	x
3.15 A	1315	250V		0.017	80	1100	78.39	x	x	x	x	x	x
4.0 A	1400	250V	40A@250Vac[1] 50A@250Vac[2]	0.0128	75	1200	126.4	x	x	x	x	x	x
5.0 A	1500	250V	50A@250Vac[1,2]	0.0101	70	1000	106.25	x	x	x	x	x	x
6.3 A	1630	250V	63A@250Vac[1,2]	0.0077	65	1200	160.74	x	x	-	x	x	x

Note:
1: Per EN/IEC/J/K 60127-1 and EN/IEC/J/K 60127-3
2: Per UL 248-1 and UL 284-14 Resistance is measured at 10% of rated current, 25DegC.


© 2020 Littelfuse, Inc.
Specifications are subject to change without notice.
Revised: 08/18/20

Downloaded from Arrow.com.

Radial Lead Fuses


TE5 > Time-Lag Fuse > 392 Series

Temperature Re-rating Curve

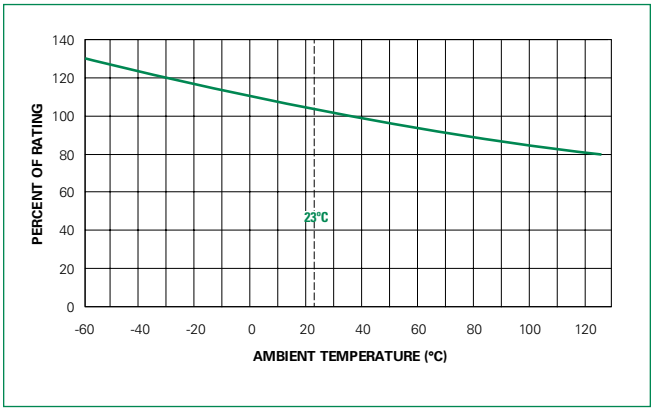


Note:
1. Rerating depicted in this curve is in addition to the standard derating of 25% for continuous operation.

Average Time Current Curves

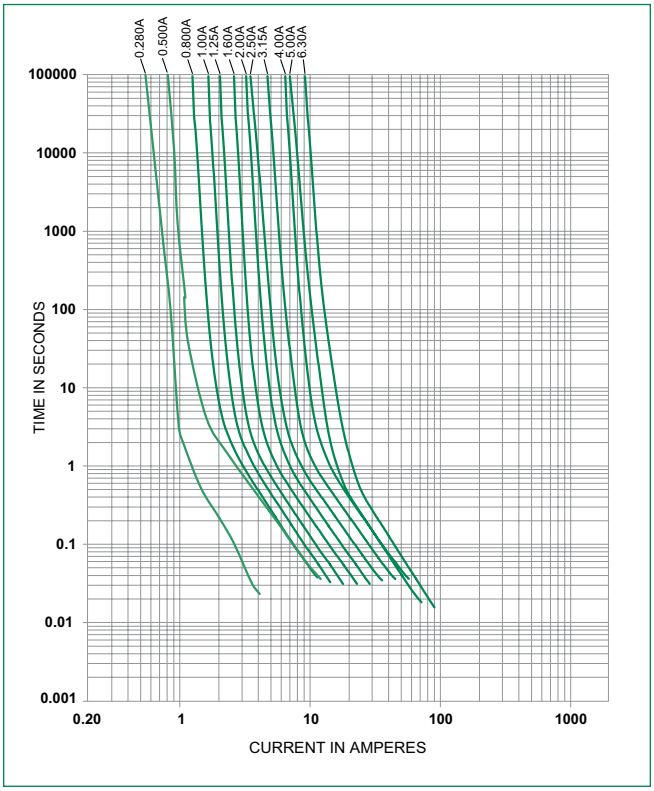

Soldering Parameters - Wave Soldering

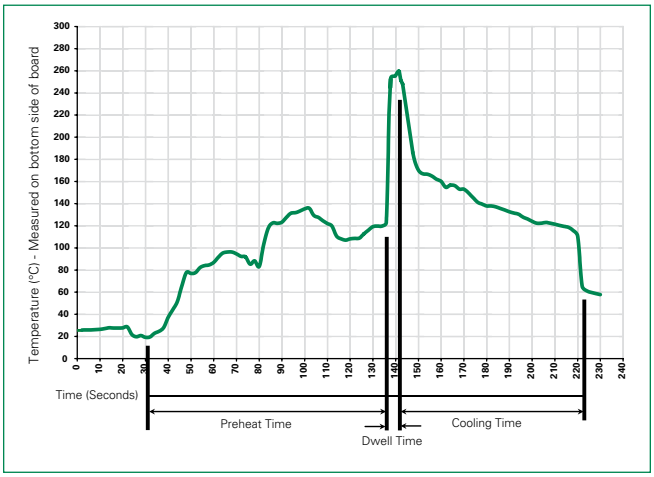

Recommended Process Parameters:

Wave Parameter	Lead-Free Recommendation
Preheat: (Depends on Flux Activation Temperature)	(Typical Industry Recommendation)
Temperature Minimum:	100°C
Temperature Maximum:	150°C
Preheat Time:	60-180 seconds
Solder Pot Temperature:	260°C Maximum
Solder Dwell Time:	2-5 seconds

Recommended Hand-Solder Parameters:
Solder Iron Temperature: 350°C +/- 5°C
Heating Time: 5 seconds max.
Note: These devices are not recommended for IR or Convection Reflow process.

© 2020 Littelfuse, Inc.
Specifications are subject to change without notice.
Revised: 08/18/20

Downloaded from Arrow.com.

Radial Lead Fuses


TE5 > Time-Lag Fuse > 392 Series

Product Characteristics

Materials	Base/Cap: Thermoplastic Polyamide PA 6.6, UL 94 V-0 Round Pins: Copper, Tin-plated
Lead Pull Strength	10 N (IEC 60068-2-21)
Solderability	260°C, ≤ 3 sec. (Wave) 350°C, ≤ 3 sec. (Soldering iron)
Soldering Heat Resistance	260°C, 10 sec. (IEC 60068-2-20) 350°C, ≤ 3 sec. (Soldering iron)

Operating Temperature	–40°C to +125°C (Consider re-rating)
Climatic Category	–40°C to +85°C/21 days (IEC 60068-1, -2-1, -2-2, -2-78)
Stock Condition	+10°C to +60°C Relative humidity ≤ 75% yearly average, without dew, maximum value for 30 days - 95%
Vibration Resistance	24 cycles at 15 min. each (IEC 60068-2-6) 10 – 60Hz at 0.75mm amplitude 60 – 2000Hz at 10g acceleration

Dimensions



Holes in the printed circuit board

Long Leads (L=18.8mm)
Short Leads (L=4.3mm)

Part Numbering System

392 xxxx 0000

Series

Amp Code

Refer to Amp Code column of Electrical Characteristics Table

Packaging Code

0000 Tape/Ammopack (1,400 pcs.)
0440 Short Leads - Bulk (1,400 pcs.)

Packaging

Packaging Option	Packaging Specification	Quantity	Quantity & Packaging Code	Taping Width
Tape and Ammopack	N/A	1,400	0000	N/A
Short Leads	N/A	1,400	0440	N/A

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at: www.littelfuse.com/disclaimer-electronics.

© 2020 Littelfuse, Inc.
Specifications are subject to change without notice.
Revised: 08/18/20

Downloaded from Arrow.com.