
HIRSCHMANN® Test & Measurement
A BRAND OF SKS


SKS Kontakttechnik GmbH

Plugs

MSTF 2

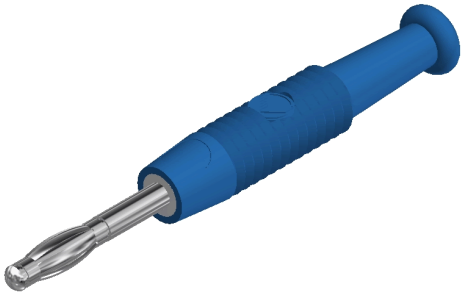

CE

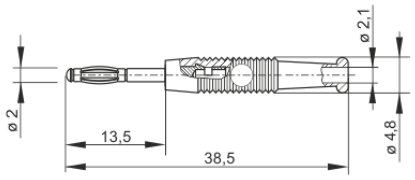Product	MSTF 2
description	Spring-loaded 2 mm plug, for leads up to 0.5 mm² and a maximum outer diameter of 2 mm, suitable to all unsprung 2 mm connections.
operating instruction	BA207
article-no. / *colour	9384201xx 00 black · 01 red · 02 blue · 03 yellow · 04 green · 06 gray · 07 white Ni
drawing	
	
technical data	
connection	solder connection
rated voltage	30 VAC / 60 VDC
measurement cat. acc. to IEC 61010	O (2)
rated current (consider derating curve)	6 A
material plug	brass, nickel plated
housing material	PVC-P
temperature range acc. To IEC61010(1)	-15 °C to +70 °C

(1) contact the manufacturer for applications at deviating temperature ranges
(2) without rated measurement category, for other circuits that are not directly connected to mains
stand: 21.06.2022

stand: 21.06.2022

2 mm F system