



Leiterplatten-Layout Vorschlag für SMT
PCB-Layout Proposal for SMT

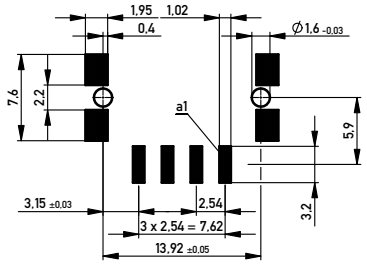








Anforderungsstufe 1
Performance Level 1

Kontaktbereich vergoldet
Mating Area gold plating


Anschlussbereich verzinnt 4-6 µm
Terminal Area 4-6 µm tin plating






Koplanarität der Anschlüsse ≤ 0,1 mm
Coplanarity Area of Termination ≤ 0,1 mm

Verpackt in Gurtverpackung
Tape on Reel Packaging
Verpackungseinheit: 440 Stück
Packaging unit: 440 pcs



Abspulrichtung - *Reel off Direction*

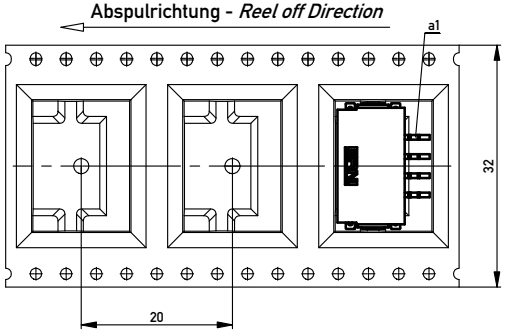

Ident-Nr. *part-no.*	Codierung *coding*	Farbe *color*	A	B	C	D	Bemerkung *note*
454193		weiß *white*	0,3	4,5	0,9	3,9	Codierung wie Variante schwarz *Encoding such variant black*
384474		rot *red*	3,9	0,9	4,5	0,3	
384473		grün *green*	2,7	2,1	3,3	1,5	
384472		blau *blue*	1,5	3,3	2,1	2,7	
384471		schwarz *black*	0,3	4,5	0,9	3,9	

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed

Information:	Tolerances: All Dimensions in mm	Scale 3:1	
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	Subject to modification without prior notice. Drawing will not be updated.	Designation: M 2,54 SRC-A, 4-polig	
b 15.04.2013 Index Date	ERNI www.ERNI.com	324068	I A2
		Class SRCA	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

384471 384474 384472 384473 384471-E 384472-E 384473-E 384474-E