



ohne Ansaughaube / *without hood*





ohne Ansaughaube / *without hood*

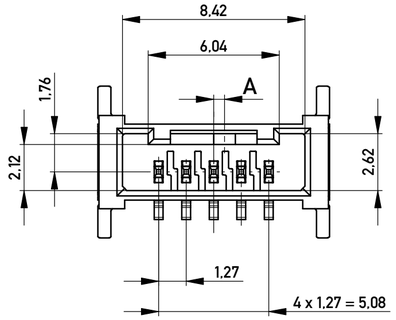


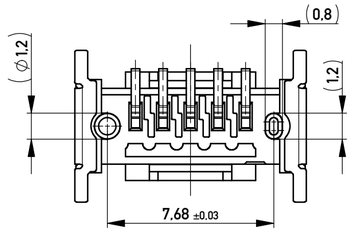

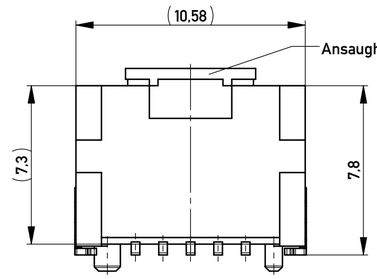


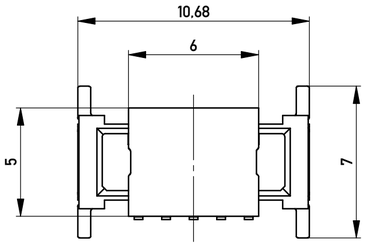







Verpackt im Gurt in Anlehnung an DIN IEC 60286-3
tape on reel packaging according to DIN IEC 60286-3
Verpackungseinheit: 440 Stück
packaging unit: 440 pcs

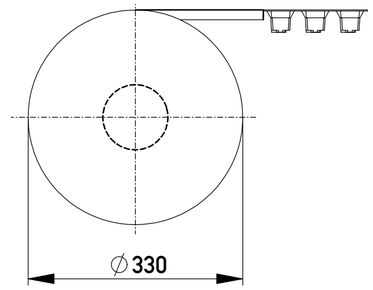

Abspulrichtung - *Reel off direction*

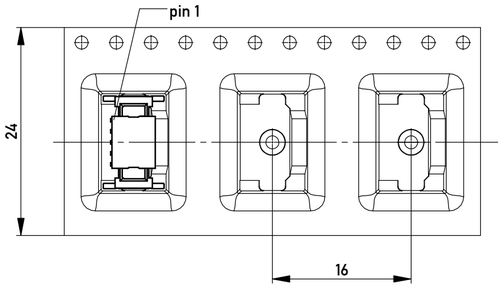

Layoutvorschlag
recommended layout




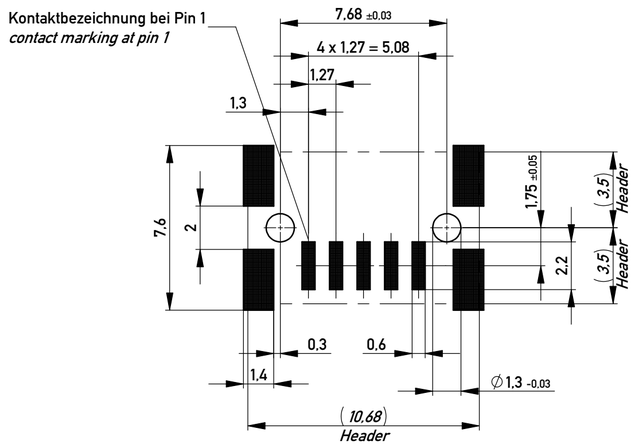


Anforderungsstufe 1
performance level 1

Kontaktbereich vergoldet
mating area gold plating

Anschlussbereich verzinnt 4-6 µm
terminal area 4-6 µm tin plating

Koplanarität der Anschlüsse ≤ 0,1 mm
coplanarity area of termination ≤ 0,1 mm

Ident-Nr. *part-no.*	Codierung *coding*	Farbe *colour*	A	Bemerkung *remark*
504408		rot *red*	1,5	
504407		grün *green*	1,5	
504406		blau *blue*	0,5	
504405		schwarz *black*	0,5	

Copyright by ERNI Production GmbH & Co. KG
Proprietary notice pursuant to ISO 16016 to be observed.

Information:

Tolerances
ISO 2768-fH
ISO 8015

All Dimensions in mm

Scale 5:1

All rights reserved.
Only for Information.
To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.

Subject to modification without prior notice.
Drawing will not be updated.

Designation
M 1,27 MCB-P SMT 05-pin

ERNI www.ERNI.com

504404

Index		Date	
b		31.07.2018	

I
A2

Class MCBP

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

504405 504405-E