
Product Data Sheet

DIN 41612 Female 90°, type R/3, Part No. 116-80064



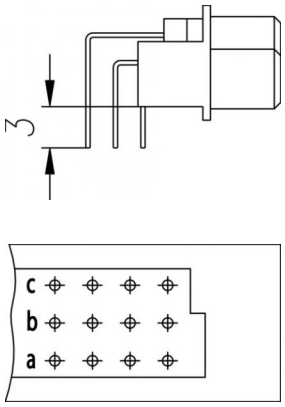


Illustration similar



Perpendicular



Through Hole



Rugged

- Termination length 3 mm
- 30 contacts
- solder
- performance level 2

» to product on www.ept.de

» to product group DIN 41612

ept GmbH | Bergwerkstr. 50 | 86971 Peiting | Tel. +49 (0) 8861 / 25 01 0 | Fax +49 (0) 8861 / 55 07 | sales@ept.de | **www.ept.de**

Product Data Sheet

DIN 41612 Female 90°, type R/3, Part No. 116-80064

Technical Specifications

Basics

Specification	IEC 60603-2 (DIN 41612)
Performance Level	2
No. of Contacts	30
Termination Technology	solder
Termination Length	3 mm
Operating Temperature Range	-55°C to +125°C

Material

Insulator Material	PBT glass filled UL 94 V-0
CTI value *IEC 60112*	200
Contact Material	Copper alloy

Mechanical

Pitch	2.54 mm
Mating Force	< 28 N
Separating Force per Pin	> 0.15 N
Durability	400 mating cycles

Electrical

Operational Current	1.5 A
Contact Resistance	<20 mΩ
Clearance and Creepage	≥ 1.2 mm
Insulation Resistance	$>10^6$ MΩ
Test Voltage	1000 V

Processing


Soldering Temperature	to 260°C

Approval / Compliance

UL file	E130314
Environment	RoHS compliant

ept GmbH | Bergwerkstr. 50 | 86971 Peiting | Tel. +49 (0) 8861 / 25 01 0 | Fax +49 (0) 8861 / 55 07 | sales@ept.de | **www.ept.de**

Derating Diagram

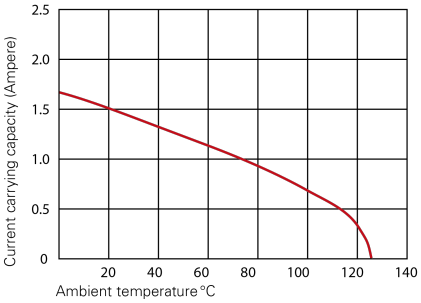


Type B, Q, C, R


20 °C	1.5 A
70 °C	1.1 A
100 °C	0.7 A

Options

Board Lock 90°

Suitable for connectors with type B, C, D, E, F, G male connectors and R female connectors





Type of Insertion	Forces			PCB Thickness	Part Number
	F_m	not soldered F_h	soldered F_h		
Locked	< 30 N	> 10 N	> 20 N	≤ 1.6 mm	116-80064C1
Under Tension	< 30 N	> 7.5 N	> 20 N	> 1.6 mm	

Modifications

Available on request

- Contact arrangement
- Performance levels I + III or customer-specific
- Special contact length

Drawings

Component data in 2D and 3D format you can download here:

» PDF » 3D IGES » 3D STEP » 3D PDF

ept GmbH | Bergwerkstr. 50 | 86971 Peiting | Tel. +49 (0) 8861 / 25 01 0 | Fax +49 (0) 8861 / 55 07 | sales@ept.de | **www.ept.de**