




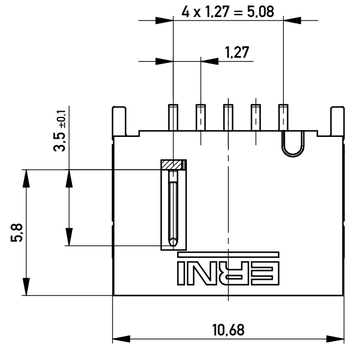




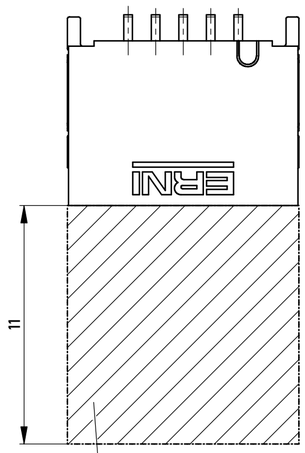






Sperrfläche für Leiterbahnen gültig bei Verwendung von Gegenstecker Federleiste 90° in IDC Ausführung
Restricted area for conductors valid for use by mating female connector 90° in IDC version

Verpackt im Gurt in Anlehnung an DIN IEC 60286-3
tape on reel packaging according to DIN IEC 60286-3
Verpackungseinheit: 900 Stück
packaging unit: 900 pcs

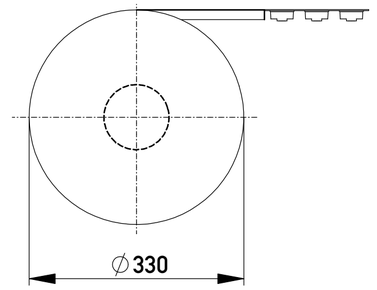


Abspulrichtung - *Reel off direction*

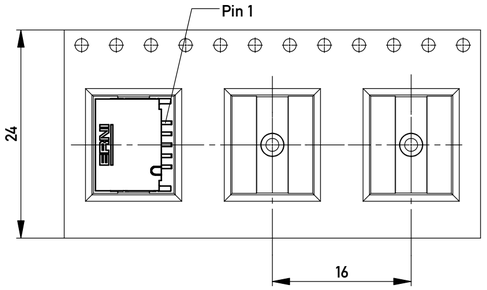

504268		rot *red*	1,5	
504267		grün *green*	1,5	
504266		blau *blue*	0,5	
504265		schwarz *black*	0,5	
Ident-Nr. *part-no.*	Codierung *coding*	Farbe *colour*	A	Bemerkung *remark*

Layoutvorschlag
recommended layout

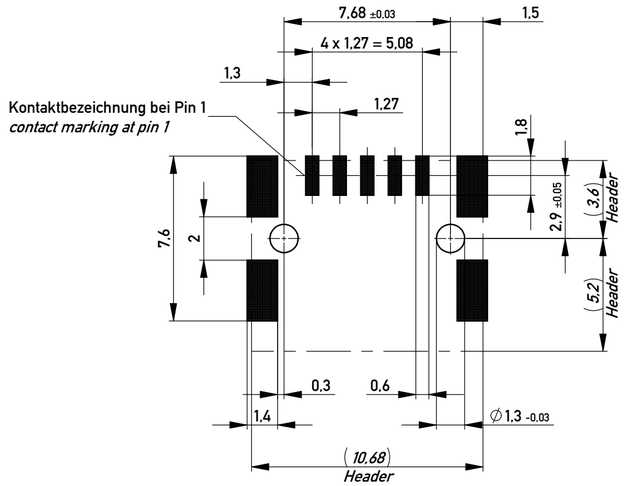

Kontaktbezeichnung bei Pin 1
contact marking at pin 1

Anforderungsstufe 1
performance level 1

Kontaktbereich vergoldet
mating area gold plating

Anschlussbereich verzinnt 4-6 µm
terminal area 4-6 µm tin plating

Koplanarität der Anschlüsse ≤ 0,1 mm
coplanarity area of termination ≤ 0,1 mm

Copyright by ERNI Production GmbH & Co. KG
Proprietary notice pursuant to ISO 16016 to be observed.

Information:

Tolerances
ISO 2768-fH
ISO 8015

All Dimensions in mm

Scale 5:1

All rights reserved.
Only for Information.
To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.

Subject to modification without prior notice.
Drawing will not be updated.

Designation
M 1,27 MCB-A SMT 05-pin

ERNI www.ERNI.com

504264

Index		Date	
b		31.07.2018	

I
A2

Class MCBA

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ERNI Electronics:

504265 504265-E