

Solderless connectors to DIN, Cu, long type



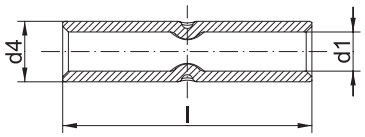



- For round conductors, e.g. to DIN EN 60228 Cl. 2, 5 and 6
- To DIN 46341, Part 1, Form B
- Simple and safe processing due to butt mark

Characteristics

- Simple cable entry due to internal chamfer
- Annealed material optimises material and crimping properties

Material

- Copper (EN13600)

Surface

- Tin-plated to protect against corrosion

Technical instructions

- Tool: see page 82

Nominal cross section mm²	Nominal size to DIN	Part No.	Dimension mm			Weight 100 pcs. ~kg	Packing unit/pcs
			d1	d4	l		
0.5 - 1	1	**1620L**	1.6	3.2	15	0.08	100
1.5 - 2.5	2.5	**1630L**	2.3	3.9	15	0.10	100
4 - 6	6	**1650L**	3.6	5.6	15	0.19	100
10	10	**1652L**	4.5	6.7	21	0.36	100
16	16	**1653L**	5.8	8.2	26	0.62	100
25	25	**1654L**	7.5	10.5	29	1.11	100
35	35	**1655L**	9.0	12.2	32	1.50	100
50	50	**1656L**	11.0	14.6	38	2.44	100
70	70	**1657L**	13.0	17.0	42	3.54	50
95	95	**1658L**	15.0	20.0	48	5.87	50
120	120	**1659L**	16.5	22.5	52	8.46	50
150	150	**1660L**	19.0	25.4	56	10.86	50