




Verpackt im Gurt nach DIN IEC 60286-3
Tape on Reel Packaging according to DIN IEC 60286-3
Verpackungseinheit: 840 Stück
Packaging unit: 840 pcs




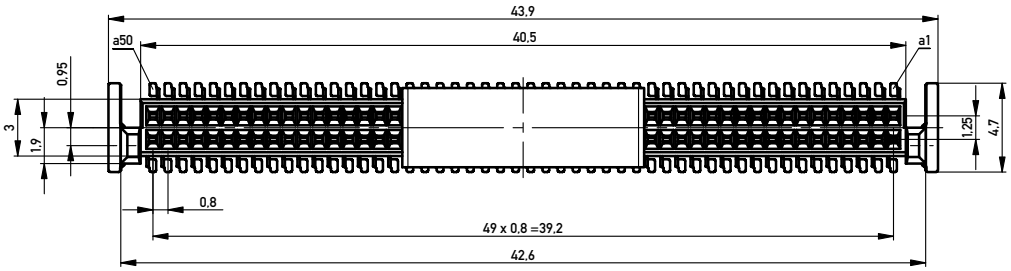

Abspulrichtung - *Reel off Direction*

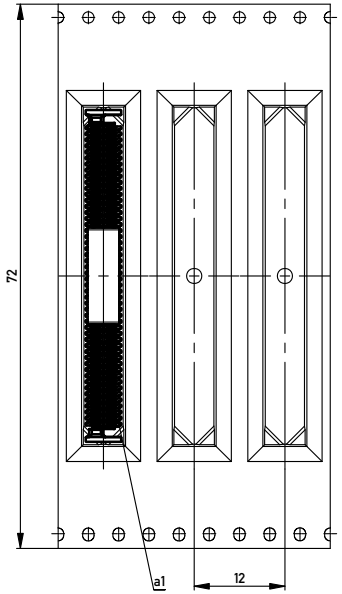

ohne Ansaughaube - *without hood*

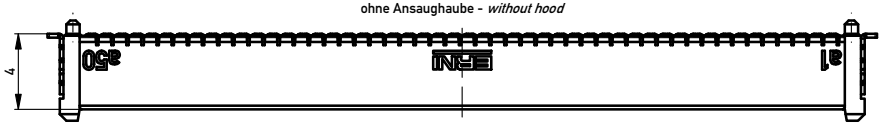


Anforderungsstufe 1
Performance Level 1

Kontaktbereich vergoldet
Mating Area gold plating

Anschlussbereich verzinnt 4-6 µm
Terminal Area 4-6 µm tin plating

Koplanarität der Anschlüsse ≤ 0,1 mm
Coplanarity Area of Termination ≤ 0,1 mm

Leiterplatten-Layout Vorschlag für SMT
PCB-Layout Proposal for SMT

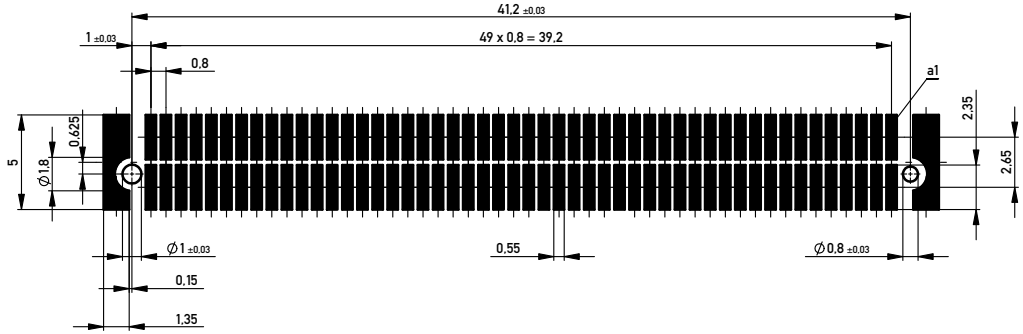

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed

Information:	Tolerances	All Dimensions in mm	Scale 5:1
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	Subject to modification without prior notice. Drawing will not be updated.		Designation 0,8 DRC-B, F 4mm, 100 polig *0,8 DRC-B, F 4mm, 100 pin*
a 02.06.2015 Index Date	ERNI www.ERNI.com		294009 I A2
			Class DRCB

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

294009 294009-E