
Butt connectors, Cu, standard type









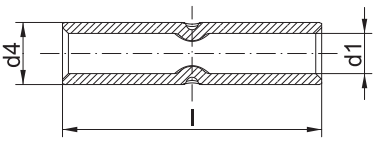

- For multi-stranded, round conductors e.g. to DIN EN 60228 Cl. 2
- For pre-rounded multi-stranded sector shaped conductors
- Simple cable entry for internal chamfer
- In combination with EKM 60 ID suitable for fine-stranded conductors

Characteristics

- Simple and safe processing due to butt mark
- Annealed material optimises material and crimping properties
- Item identification on cable lug

Material

- Copper (EN13600)

Surface

- Tin-plated to protect against corrosion

Technical instructions

- Tool: see page 38
- Sleeves for compacted conductors and sleeves for 3-core and 4-core cables, see chapter „Sleeves for compacted conductors and sector shaped conductors - Cu“

Additional information

- Also available as featured article without buttmark, part number appendix „OM“

Nominal cross section mm²	Part No.	Dimension mm			Weight/ 100 pcs. ~ kg	Packing unit/pcs
		d1	d4	l		
0.75	**17R**	1.3	2.8	20	0.09	100
1.5	**18R**	1.8	3.3	25	0.12	100
2.5	**19R**	2.3	4.2	25	0.20	100
4	**20R**	3.0	5.0	25	0.26	100
6	**21R**	3.5	6.5	25	0.50	100
10	**22R**	4.5	7.0	30	0.72	100
16	**23R**	5.5	8.5	35	1.00	100
25	**24R**	7.0	10.0	40	1.41	50
35	**25R**	8.5	12.0	45	2.24	50
50	**26R**	10.0	14.0	50	3.36	50
70	**27R**	12.0	16.5	55	4.87	50
95	**28R**	13.5	18.0	60	5.91	25
120	**29R**	15.0	19.5	65	7.00	25
150	**30R**	16.5	21.0	70	8.12	10
185	**31R**	19.0	24.0	75	10.06	10
240	**32R**	21.0	26.0	85	13.82	10
300	**33R**	23.5	29.5	100	21.94	5
400	**34R**	27.0	34.0	100	29.65	5