

marathon® Special Products

Product Data Sheet

144X575

Replace "x" with 1, 2, or 3 for number of poles

Power Terminal Block

380 Amps 600 Volts AC/DC

Wire Range

- Line: (1) 500 kcmil - #4 AWG
- Load: (1) 3/8 - 16 X 1 5/16 stud

Electrical Ratings

- 380 Amps
- 600V per UL 1059 & CSA 22.2 No.158, class B & C requirements
- SCCR of 10,000 A (default for terminal blocks)
- CU7AL - 75°C connector terminal rating with copper or aluminum wire
- Factory & Field Wiring

Agency Compliance


- UR - UL Recognized Terminal Block, Evaluated to UL 1059, File No.XCFR2.E62806
- CSA - certifed to C22.2 No. 158, File No. LR19766 (wire classes B & C only)
- CE compliant to IEC 60947-7-1

Material Information


- Insulator base:
  - Phenolic
  - Flammability rating of insulator base UL94V0
  - Insulator base temperature rating: -40°C to 150°C (UL RTI)
- Connector: aluminum, tin plated
- Threaded stud: brass, tin plated
- Nuts: brass, nickel plated
- Terminal set screws: aluminum, tin plated
- Connector mounting screws: steel, zinc plated
- RoHS compliant

Downloaded from Arrow.com.

Termination Specifications

Line Side	Wire Size (CU Stranded)	Torque	Wires / Terminal	Wire Class (UL) [1]
	500 kcmil	42.4 N·m (375 lbf·in)	1	B, C
	400 - 2	42.4 N·m (375 lbf·in)	1	B, C, G, H, I (DLO)
	4	42.4 N·m (375 lbf·in)	1	B, C

- Aluminum wire range: 500 kcmil - #4 AWG
- Wire strip length: 1 1/4in. (32mm)
- Terminal screw drive: 3/8 in. (8mm) hex

Load Side	Termination Type	Torque	Stud Length	Maximum Lug/Bar Width
	Listed lugs on 3/8 - 16 studs	21.7 N·m (192 lbf·in)	1 5/16" (33mm)	1.50" (38mm)

- For use with conductors prepared with listed connectors such as single hole compression/crimp lugs or listed ring, fork or spade terminals.
- Conductor size, ampacity, temperature rating and type are dictated by the ratings of the listed lugs utilized and applicable code requirements.

[1] For information on copper stranded wire classes please visit:

http://www.marathonsp.com/flexible-stranded-wire.php

Downloaded from Arrow.com.

Installation & Accessories

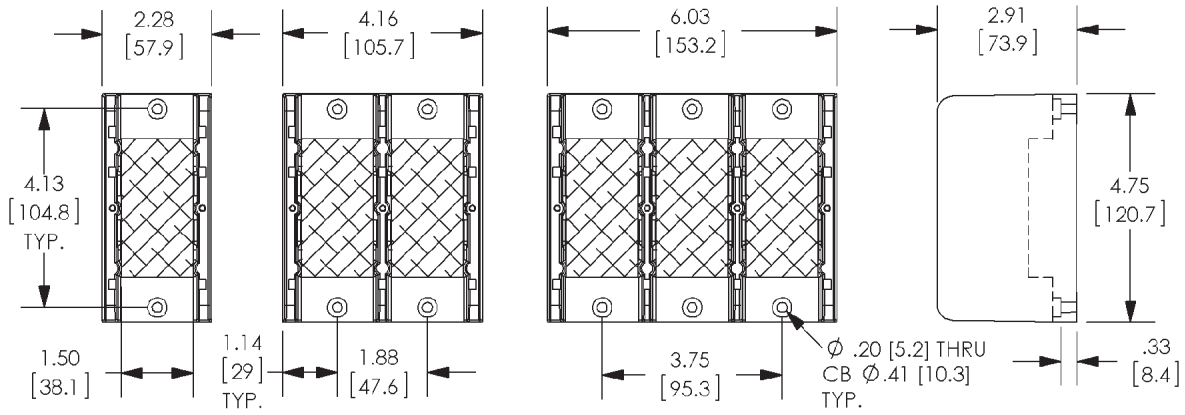
- Mounting (Panel):
  - For use with #10 fastener.
  - Torque mounting fastener to 25-30 lbf·in (2.8 - 3.4 N·m).

- Covers:
  - Flat covers available upon request
  - Catalog Number: CC 144x (replace "x" with number of poles)
  - Covers are clear polycarbonate
  - Accessory covers are not intended to provide insulation for electrical spacings.

- Marker Strip: white vinyl strip with mounting screws available.

- Printing options available, consult customer service for specifications.

Drawing



Downloaded from Arrow.com.