
AN5521

AN5521

TV Vertical Deflection Output IC

■ Overview

The AN5521 is an integrated circuit designed for TV vertical deflection output circuit. Combining with the deflection-signal processing IC, the vertical output circuit design becomes easy.

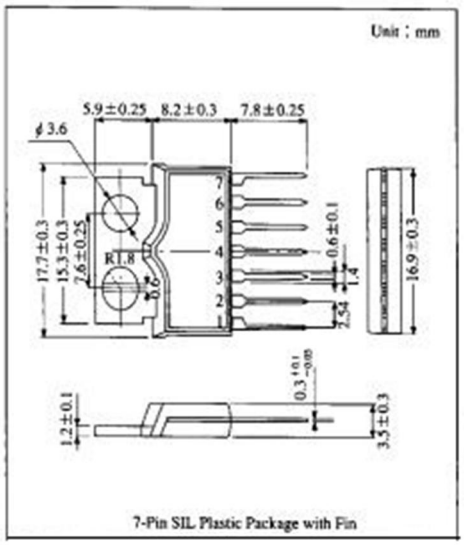

7-Pin SIL Plastic Package with Fin


■ Features

- Low power cosumption, direct deflection coil driving capability (Flyback voltage of two times as high as supply voltage is applied during only flyback period)
- High breakdown voltage : 60V

■ Pin Descriptions

Pin No.	Pin name
1	GND
2	Output
3	Supply voltage for output
4	Input
5	Trigger pulse input
6	Pulse amp. output
7	V_{CC}

■ Block Diagram

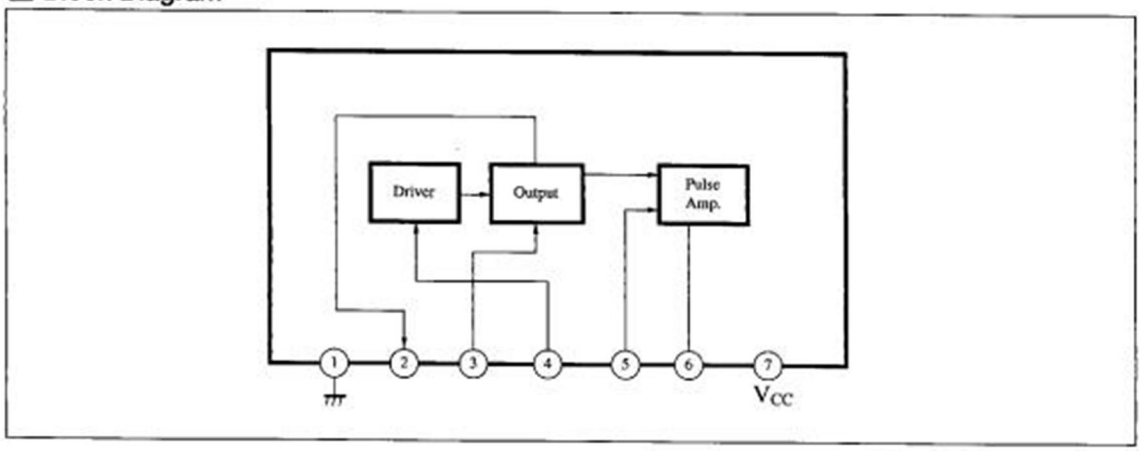

■ Absolute Maximum Ratings (Ta=25℃)

Parameter		Symbol	Rating		Unit
Voltage	Supply voltage	V_{CC}	30		V
	Circuit voltage	$V_{3\text{-}1}$	0	60	V
		$V_{4\text{-}1}$	−1	6	V
		$V_{5\text{-}1}$	−1	3	V
Current	Supply current	I_{CC}	360		mA
	Circuit current	I_2	−1800	1800	$mA_{O\text{-}P}$
		I_6	−1800	1800	$mA_{O\text{-}P}$
Power dissipation		P_D	8		W
Temperature	Operating ambient temperature	T_{opr}	−20 to +70		℃
	Storage temperature	T_{stg}	−55 to +150		℃

■ Electrical Characteristics (Ta=25℃)

Parameter	Symbol	Condition	min	typ	max	Unit
Deflection current	$I_{y(P\text{-}P)}$		1700	1800	1900	$mA_{P\text{-}P}$
Deflection current linearity	$\Delta I_{y(+)}$		59	—	175	$mA_{P\text{-}P}$
Deflection current linearity	$\Delta I_{y(-)}$		54	—	162	$mA_{P\text{-}P}$
Deflection current change with ambient temperature *	$\Delta I_y/T_a$	T_a=−20 to +70℃	−1.5	—	1.5	%
Center voltage	V_{MID}		13.2	13.8	14.4	V
Flyback pulse amplitude	$V_{(FBP)}$		47	—	—	V
Static circuit current	I_{CQ}	$V_{3\text{-}1}$=24V $V_{7\text{-}1}$=24V $V_{5\text{-}1}$=0 ② 12kΩ 7.5kΩ ④, 910Ω	7	15	30	mA
Output Tr saturation voltage	$V_{3\text{-}2}$	$V_{3\text{-}1}$=$V_{7\text{-}1}$=24V, Pin②-①=33Ω $V_{4\text{-}1}$=0.3V, $V_{5\text{-}1}$=0	—	3.0	4.0	V
Output Tr Saturation voltage	$V_{2\text{-}1}$	$V_{3\text{-}1}$=$V_{7\text{-}1}$=24V, Pin②-③=33Ω $V_{4\text{-}1}$=1.3V, $V_{5\text{-}1}$=0	—	1.3	2.0	V
Q_{21} saturation voltage	$V_{6\text{-}1}$	$V_{7\text{-}1}$=24V, Pin⑦-⑥=1.2kΩ $V_{5\text{-}1}$=0	—	—	0.5	V
Thermal resistance	$R_{th(j\text{-}c)}$		—	—	4	℃/W

■ Application Circuit

