Innovative Service Around the Globe YAGEO

DATA SHEET

GENERAL PURPOSE CHIP RESISTORS

RC_L series

±0.1%, ±0.5%, ±1%, ±5%

Sizes 0075/0100/0201/0402/0603/0805/ 1206/1210/1218/2010/2512

RoHS compliant & Halogen free



YAGEO Phycomp

Product specification – May 15, 2020 V.11

SCOPE

This specification describes RC series chip resistors with lead free terminations made by thick film process.

APPLICATIONS

- All general purpose application

FEATURES

- Halogen Free Epoxy
- RoHS compliant
  - Products with lead free terminations meet RoHS requirements
  - Pb-glass contained in electrodes, resistors element and glass are exempted by RoHS
- Reducing environmentally hazardous wastes
- High component and equipment reliability
- Saving of PCB space
- None forbidden-materials used in products/production

ORDERING INFORMATION - GLOBAL PART NUMBER

Global part numbers are identified by the series, size, tolerance, packing type, temperature coefficient, taping reel and resistance value.

GLOBAL PART NUMBER

RC	XXXX	X	X	X	XX	XXXX	L
	(1)	(2)	(3)	(4)	(5)	(6)	(7)

(1) SIZE

0075/0100/0201/0402/0603/0805/1206/1210/1218/2010/2512

(2) TOLERANCE

B = ±0.1%
D = ±0.5%
F = ±1.0%
J = ±5.0% (for jumper ordering, use code of J)

(3) PACKAGING TYPE

R = Paper taping reel
K = Embossed taping reel
S = ESD safe reel (0075/0100 only)

(4) TEMPERATURE COEFFICIENT OF RESISTANCE

- = Based on spec.

(5) TAPING REEL & POWER

07= 7 inch dia. Reel
10=10 inch dia. Reel
13=13 inch dia. Reel
7W = 7 inch dia. Reel & 2 x standard power
7N = 7 inch dia. Reel, ESD safe reel (0075/0100 only)
3W = 13 inch dia. Reel & 2 x standard power

(6) RESISTANCE VALUE

There are 2~4 digits indicated the resistance value.
Letter R/K/M is decimal point
Example:
97R6 = 97.6Ω
9K76 = 9760Ω
1M = 1,000,000Ω

(7) DEFAULT CODE

Letter L is the system default code for ordering only.(Note)

ORDERING EXAMPLE

The ordering code for a RC0402 0.0625W chip resistor value 100KΩwith ±5% tolerance, supplied in 7-inch tape reel of 10,000 units per reel is: RC0402JR-07100KL.

NOTE

1. All our RSMD products meet RoHS compliant and Halogen Free. "LFP" of the internal 2D reel label mentions "Lead Free Process".
2. On customized label, "LFP" or specific symbol can be printed.

MARKING

RC0075 / RC0100 / RC0201 / RC0402



Fig. 1

No Marking

RC0603



Fig. 2 $240 = 24 \times 10^0 = 24$

1%, 0.5%,E24 exception values 10/11/13/15/20/75 of E24 series



Fig. 3 $88A = 806 \times 10^0 = 806\ \Omega$

1%, 0.5%, E96 refer to EIA-96 marking method, including values 10/11/13/15/20/75 of E24 series



Fig. 4 Value = 10 KΩ

5%, E24 series : 3 digits
First two digits for significant figure and 3rd digit for number of zeros

RC0805 / RC1206 / RC1210 / RC2010 / RC2512



Fig. 5 Value = 10 KΩ

1%, 0.5%, E24/E96 series : 4 digits
First three digits for significant figure and 4th digit for number of zeros



Fig. 6 Value = 10 KΩ

5%, E24 series : 3 digits
First two digits for significant figure and 3rd digit for number of zeros

RC1218




Fig. 7 Value = 10 KΩ

E-24 series: 3 digits, ±5%
First two digits for significant figure and 3rd digit for number of zeros




Fig. 8 Value = 10 KΩ

Both E-24 and E-96 series: 4 digits, ±1% & ±0.5%
First three digits for significant figure and 4th digit for number of zeros

For further marking information, please see special data sheet "Chip resistors marking".

CONSTRUCTION

The resistor is constructed on top of a high-grade ceramic body. Internal metal electrodes are added on each end to make the contacts to the thick film resistive element. The composition of the resistive element is a noble metal imbedded into a glass and covered by a second glass to prevent environmental influences. The resistor is laser trimmed to the rated resistance value. The resistor is covered with a protective epoxy coat, finally the two external terminations (matte tin on Ni-barrier) are added, as shown in Fig.9.

Outlines

For dimensions, please refer to Table 1

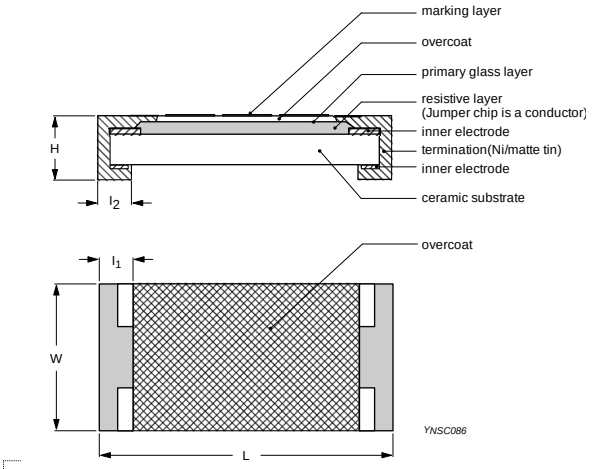


Fig. 9 Chip resistor outlines

DIMENSION

Table 1

TYPE	L (mm)	W (mm)	H (mm)	l_1 (mm)	l_2 (mm)
RC0075	0.30±0.01	0.15±0.01	0.13±0.01	0.08±0.03	0.08±0.03
RC0100	0.40±0.02	0.20±0.02	0.13±0.02	0.10±0.03	0.10±0.03
RC0201	0.60±0.03	0.30±0.03	0.23±0.03	0.10±0.05	0.15±0.05
RC0402	1.00±0.05	0.50±0.05	0.35±0.05	0.20±0.10	0.25±0.10
RC0603	1.60±0.10	0.80±0.10	0.45±0.10	0.25±0.15	0.25±0.15
RC0805	2.00±0.10	1.25±0.10	0.50±0.10	0.35±0.20	0.35±0.20
RC1206	3.10±0.10	1.60±0.10	0.55±0.10	0.45±0.20	0.40±0.20
RC1210	3.10±0.10	2.60±0.15	0.55±0.10	0.45±0.15	0.50±0.20
RC1218	3.10±0.10	4.60±0.10	0.55±0.10	0.45±0.20	0.40±0.20
RC2010	5.00±0.10	2.50±0.15	0.55±0.10	0.60±0.20	0.50±0.20
RC2512	6.35±0.10	3.10±0.15	0.55±0.10	0.60±0.20	0.50±0.20

ELECTRICAL CHARACTERISTICS

Table 2

CHARAC-TERISTICS	POWER	OPERATING TEMPERATURE RANGE	MAXIMUM WORKING VOLTAGE	MAXIMUM OVERLOAD VOLTAGE	DIELECTRIC WITHSTANDING VOLTAGE	RESISTANCE RANGE	TEMPERATURE COEFFICIENT	JUMPER CRITERIA
RC0075	1/50 W	-55°C to 125°C	10V	25V	25V	5% (E24) 10Ω≦R≦1MΩ 1% (E24/E96) 10Ω≦R≦1MΩ Jumper<50mΩ	10Ω≦R<100Ω -200~+600ppm°C 100Ω≦R≦1MΩ ±200ppm°C	Rated Current 0.5A Maximum Current 1.0A
RC0100	1/32 W	-55°C to 125°C	15V	30V	30V	5% (E24) 1Ω≦R≦22MΩ 1% (E24/E96) 1Ω≦R≦10MΩ 0.5% (E24/E96) 33Ω≦R≦470KΩ Jumper<50mΩ	1Ω≦R<10Ω -200~+600ppm°C 10Ω≤ R < 100Ω: ±300ppm/°C 100Ω≤ R ≤ 10MΩ: ±200ppm/°C 10MΩ< R ≤ 22MΩ: ±250ppm/°C	Rated Current 0.5A Maximum Current 1.0A

Table 2

CHARAC-TERISTICS	POWER	OPERATING TEMPERATURE RANGE	MAXIMUM WORKING VOLTAGE	MAXIMUM OVERLOAD VOLTAGE	DIELECTRIC WITHSTANDING VOLTAGE	RESISTANCE RANGE	TEMPERATURE COEFFICIENT	JUMPER CRITERIA
RC0201	1/20 W	-55℃ to 125℃	25V	50V	50V	5% (E24) 1Ω≦R≦10MΩ 1% (E24/E96) 1Ω≦R≦10MΩ 0.5% (E24/E96) 1Ω≦R≦1MΩ 0.1% (E24/E96) 10Ω≦R≦1MΩ Jumper<50mΩ	1Ω≦R≦10Ω -100~+350ppm℃ 10Ω<R≦10MΩ ±200ppm℃	Rated Current 0.5A Maximum Current 1.0A
RC0402	1/16 W	-55℃ to 155℃	50V	100V	100V	5% (E24) 1Ω≦R≦22MΩ 1% (E24/E96) 1Ω≦R≦10MΩ 0.5% (E24/E96) 1Ω≦R≦1MΩ 0.1% (E24/E96) 10Ω≦R≦1MΩ Jumper<50mΩ	1Ω≦R≦10Ω ±200ppm℃ 10Ω<R≦10MΩ ±100ppm℃ 10MΩ<R≦22MΩ ±200ppm℃	Rated Current 1.0A Maximum Current 2.0A
	1/8W	-55℃ to 155℃	50V	100V	100V	5% (E24) 1Ω≦R≦1MΩ 1% (E24/E96) 1Ω≦R≦1MΩ	1Ω≦R≦1MΩ ±200ppm℃	
RC0603	1/10 W	-55℃ to 155℃	75V	150V	150V	5% (E24) 1Ω≦R≦22MΩ 1% (E24/E96) 1Ω≦R≦10MΩ 0.5% (E24/E96) 1Ω≦R≦1MΩ 0.1% (E24/E96) 10Ω≦R≦1MΩ Jumper<50mΩ	1Ω≦R≦10Ω ±200ppm℃ 10Ω<R≦10MΩ ±100ppm℃ 10MΩ<R≦22MΩ ±200ppm℃	Rated Current 1.0A Maximum Current 2.0A
	1/5 W	-55℃ to 155℃	75V	150V	150V	5% (E24) 1Ω≦R≦1MΩ 1% (E24/E96) 1Ω≦R≦1MΩ	1Ω≦R≦1MΩ ±200ppm℃	
RC0805	1/8 W	-55℃ to 155℃	150V	300V	300V	5% (E24) 1Ω≦R≦100MΩ 1% (E24/E96) 1Ω≦R≦10MΩ 0.5% (E24/E96) 1Ω≦R≦1MΩ 0.1% (E24/E96) 10Ω≦R≦1MΩ 10%, 20% (E24) 24MΩ≦R≦100MΩ Jumper<50mΩ	1Ω≦R≦10Ω ±200ppm℃ 10Ω<R≦10MΩ ±100ppm℃ 10MΩ<R≦22MΩ ±200ppm℃ 24MΩ<R≦100MΩ ±300ppm℃	Rated Current 2.0A Maximum Current 5.0A
	1/4 W	-55℃ to 155℃	150V	300V	300V	5% (E24) 1Ω≦R≦1MΩ 1% (E24/E96) 1Ω≦R≦1MΩ	1Ω≦R≦1MΩ ±200ppm℃	

FOOTPRINT AND SOLDERING PROFILES

For recommended footprint and soldering profiles, please refer to data sheet "Chip resistors mounting"

Table 2

CHARAC-TERISTICS	POWER	OPERATING TEMPERATURE RANGE	MAXIMUM WORKING VOLTAGE	MAXIMUM OVERLOAD VOLTAGE	DIELECTRIC WITHSTANDING VOLTAGE	RESISTANCE RANGE	TEMPERATURE COEFFICIENT	JUMPER CRITERIA
RC1206	1/4 W	-55℃ to 155℃	200V	400V	500V	5% (E24) 1Ω≦R≦100MΩ 1% (E24/E96) 1Ω≦R≦10MΩ 0.5% (E24/E96) 1Ω≦R≦1MΩ 0.1% (E24/E96) 10Ω≦R≦1MΩ 10%, 20% (E24) 24MΩ≦R≦100MΩ Jumper<50mΩ	1Ω≦R≦10Ω ±200ppm℃ 10Ω<R≦10MΩ ±100ppm℃ 10MΩ<R≦22MΩ ±200ppm℃ 24MΩ≦R≦100MΩ ±300ppm℃	Rated Current 2.0A Maximum Current 10.0A
	1/2 W	-55℃ to 155℃	200V	400V	500V	5% (E24) 1Ω≦R≦1MΩ 1% (E24/E96) 1Ω≦R≦1MΩ	1Ω≦R≦1MΩ ±200ppm℃	
RC1210	1/2 W	-55℃ to 155℃	200V	500V	500V	5% (E24) 1Ω≦R≦22MΩ 1% (E24/E96) 1Ω≦R≦10MΩ 0.1%, 0.5% (E24/E96) 10Ω≦R≦1MΩ Jumper<50mΩ	1Ω≦R≦10Ω ±200ppm℃ 10Ω<R≦10MΩ ±100ppm℃ 10MΩ<R≦22MΩ ±200ppm℃	Rated Current 2.0A Maximum Current 10.0A
RC1218	1 W	-55℃ to 155℃	200V	500V	500V	5% (E24) 1Ω≦R≦1MΩ 1% (E24/E96) 1Ω≦R≦1MΩ 0.1%, 0.5% (E24/E96) 10Ω≦R≦1MΩ Jumper<50mΩ	1Ω≦R≦10Ω ±200ppm℃ 10Ω<R≦1MΩ ±100ppm℃	Rated Current 6.0A Maximum Current 10.0A
RC2010	3/4 W	-55℃ to 155℃	200V	500V	500V	5% (E24) 1Ω≦R≦22MΩ 1% (E24/E96) 1Ω≦R≦10MΩ 0.1%, 0.5% (E24/E96) 10Ω≦R≦1MΩ Jumper<50mΩ	1Ω≦R≦10Ω ±200ppm℃ 10Ω<R≦10MΩ ±100ppm℃ 10MΩ<R≦22MΩ ±200ppm℃	Rated Current 2.0A Maximum Current 10.0A
RC2512	1 W	-55℃ to 155℃	200V	500V	500V	5% (E24) 1Ω≦R≦22MΩ 1% (E24/E96) 1Ω≦R≦10MΩ 0.1%, 0.5% (E24/E96) 10Ω≦R≦1MΩ Jumper<50mΩ	1Ω≦R≦10Ω ±200ppm℃ 10Ω<R≦10MΩ ±100ppm℃ 10MΩ<R≦22MΩ ±200ppm℃	Rated Current 2.0A Maximum Current 10.0A
	2 W	-55℃ to 155℃	200V	400V	500V	5% (E24) 1Ω≦R≦1MΩ 1% (E24/E96) 1Ω≦R≦1MΩ	1Ω≦R≦1MΩ ±200ppm℃	

PACKING STYLE AND PACKAGING QUANTITY

Table 3 Packing style and packaging quantity

PACKING STYLE	PAPER TAPING REEL (R)			ESD SAFE REEL (S) (4MM WIDTH, 1MM PITCH PLASTIC EMBOSSED)	EMBOSSED TAPING REEL
REEL DIMENSION	7" (178 mm)	10" (254mm)	13" (330 mm)	7" (178 mm)	7" (178 mm)
RC0075	---	---	---	20000	---
RC0100	20000	---	80000	40000	---
RC0201	10000	20000	50000	---	---
RC0402	10000	20000	50000	---	---
RC0603	5000	10000	20000	---	---
RC0805	5000	10000	20000	---	---
RC1206	5000	10000	20000	---	---
RC1210	5000	10000	20000	---	---
RC1218	---	---	---	---	4000
RC2010	---	---	---	---	4000
RC2512	---	---	---	---	4000

NOTE

For tape and reel specification/dimensions, please refer to data sheet "Chip resistors packing".

FUNCTIONAL DESCRIPTION

OPERATING TEMPERATURE RANGE

RC0402 to RC2512 Range: -55℃ to +155℃ (Fig. 10-1)

RC0075 to RC0201 Range: -55℃ to +125℃ (Fig. 10-2)

POWER RATING

Each type rated power at 70 °C:
RC0075=1/50W
RC0100=1/32W
RC0201=1/20W
RC0402=1/16W, 1/8W
RC0603=1/10W, 1/5W
RC0805=1/8W, 1/4W
RC1206=1/4W, 1/2W
RC1210=1/2W
RC1218=1W
RC2010=3/4W
RC2512=1W, 2W

RATED VOLTAGE

The DC or AC (rms) continuous working voltage corresponding to the rated power is determined by the following formula:

$V = \sqrt{(P \times R)}$

or max. working voltage whichever is less
Where
V = Continuous rated DC or AC (rms) working voltage (V)
P = Rated power (W)
R = Resistance value (Ω)

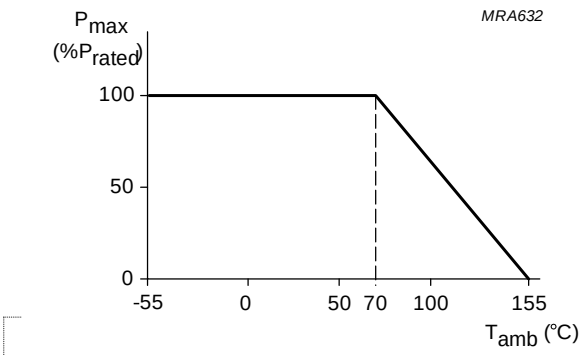


Fig. 10-1 Maximum dissipation (P) in percentage of rated poweras a function of the operating ambient temperature (Tamb)

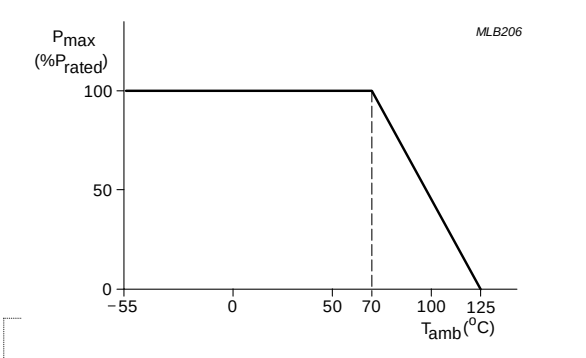


Fig. 10-2 Maximum dissipation (P) in percentage of rated poweras a function of the operating ambient temperature (Tamb)

TESTS AND REQUIREMENTS

Table 8 Test condition, procedure and requirements

TEST	TEST METHOD	PROCEDURE	REQUIREMENTS
Temperature Coefficient of Resistance (T.C.R.)	MIL-STD-202 Method 304	At +25/–55°C and +25/+125°C Formula: $T.C.R=\frac{R_2-R_1}{R_1(t_2-t_1)}\times 10^6$ (ppm/°C) Where t_1=+25 °C or specified room temperature t_2=–55 °C or +125 °C test temperature R_1=resistance at reference temperature in ohms R_2=resistance at test temperature in ohms	Refer to table 2
Life/ Endurance	MIL-STD-202 Method 108A IEC 60115-1 4.25.1	At 70±2°C for 1,000 hours; RCWV applied for 1.5 hours on and 0.5 hour off, still air required	0075: ± (5%+100mΩ) <100mΩ for jumper 01005: ±(3% +50mΩ) <100mΩf or jumper Others: ±(1%+50mΩ) for B/D/F tol ±(3%+50mΩ) for J tol <100mR for jumper
High Temperature Exposure	MIL-STD-202 Method 108A IEC 60068-2-2	1,000 hours at maximum operating temperature depending on specification, unpowered.	0075: ± (5%+100mΩ) <100mΩ for jumper 01005: ±(1% +50mΩ) < 50mΩf or jumper Others: ±(1%+50mΩ) for B/D/F tol ±(2%+50mΩ) for J tol <50mR for jumper
Moisture Resistance	MIL-STD-202 Method 106G	Each temperature / humidity cycle is defined at 8 hours (method 106F), 3 cycles / 24 hours for 10d with 25°C / 65°C 95% R.H, without steps 7a & 7b, unpowered Parts mounted on test-boards, without condensation on parts	0075: ± (2%+100mΩ) <100mΩ for jumper 01005: ±(2% +50mΩ) < 100mΩf or jumper Others: ±(0.5%+50mΩ) for B/ D/F tol ±(2%+50mΩ) for J tol <100mR for jumper
Humidity	IEC 60115-1 4.24.2	Steady state for 1000 hours at 40°C / 95% R.H. RCWV applied for 1.5 hours on and 0.5 hour off	0075: ± (5%+100mΩ) no visible damage 01005: ±(3% +50mΩ) < 100mΩf or jumper Others: ±(1%+50mΩ) for B/D/F tol ±(2%+50mΩ) for J tol <100mR for jumper

Thermal Shock	MIL-STD-202 Method 107G	-55/+125°C Note Number of cycles required is 300. Devices mounted Maximum transfer time is 20 seconds. Dwell time is 15 minutes. Air - Air	0075/01005: ±(1% +50mΩ) < 50mΩf or jumper Others: ±(0.5%+50mΩ) for B/D/F tol ±(1%+50mΩ) for J tol < 50mR for jumper
Short Time Overload	IEC 60115-1 4.13	2.5 times RCWV or maximum overload voltage which is less for 5 seconds at room temperature	0075/01005: ±(2% +50mΩ) < 50mΩf or jumper Others: ±(1%+50mΩ) for B/D/F tol ±(2%+50mΩ) for J tol <50mR for jumper No visible damage
Board Flex/ Bending	IEC 60115-1 4.33	Device mounted or as described only 1 board bending required bending time: 60±5 seconds 0075/0100/0201/0402:5mm; 0603/0805:3mm; 1206 and above:2mm	0075/01005: ±(1% +50mΩ) < 50mΩf or jumper Others: ±(1%+50mΩ) for B/D/F/J tol <50mR for jumper No visible damage
Solderability - Wetting	J-STD-002 test B	Electrical Test not required Magnification 50X SMD conditions: 1st step: method B, aging 4 hours at 155°C dry heat 2nd step: leadfree solder bath at 245±3°C Dipping time: 3±0.5 seconds	W ell tinned (>95% covered) No visible damage
-Leaching	J-STD-002 test D	Leadfree solder ,260°C, 30 seconds immersion time	No visible damage
-Resistance to Soldering Heat	MIL-STD-202 Method 210F IEC 60115-1 4.18	Condition B, no pre-heat of samples Leadfree solder, 260°C ±5°C, 10 ±1 seconds immersion time Procedure 2 for SMD: devices fluxed and cleaned with isopropanol	0075: ± (3%+50mΩ) <50mΩ for jumper 01005: ±(1% +50mΩ) < 50mΩf or jumper Others: ±(0.5% +50mΩ) for B/D/F tol. ±(1% +50mΩ) for J tol. <50mR for jumper No visible damage

REVISION HISTORY

REVISION	DATE	CHANGE NOTIFICATION	DESCRIPTION
Version 11	May 15, 2020	-	- Extend RC0201, RC0402, RC0603, RC0805, RC1206 D tol resistance range to 1ohm
Version 10	Dec. 12, 2018	-	- Updated 0075 dimensions
Version 9	Mar. 06, 2018	-	- Add 0.5%/1% marking rule for RC0603 ~ RC2512 based on marking datasheet
Version 8	July 10, 2017	-	- Add "3W" part number coding for 13" Reel & double power
Version 7	Mar. 7, 2017	-	- Add 10" packing
Version 6	Feb.15, 2017	-	- Extend RC0805 and RC1206 resistance range to 100Mohm
Version 5	Oct. 06, 2016	-	- Description: Update Dimension of l2 of RC2512 (2W)
Version 4	Jan. 22, 2016	-	- Update resistance range
Version 3	Dec. 24, 2015	-	- Updated test and requirements
Version 2	Jul. 23, 2015	-	- Updated test and requirements
Version 1	Jan. 21, 2015	-	- ESD Safe Reel update
Version 0	Dec. 15, 2014	-	- First issue of this specification

" Yageo reserves all the rights for revising the content of this datasheet without further notification, as long as the products itself are unchanged. Any product change will be announced by PCN."

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Yageo:

RC1210FR-0717K4L

YAGEO:

RC1218JK-07330KL RC2512FK-7W2R49L RC1218FK-07240KL RC1218FK-0740K2L RC1218JK-0751KL RC1218FK-075R1L RC2512JK-7W1R8L RC2512JK-7W8R2L RC2512FK-071R37L RC1218FK-07105RL RC1218FK-0790R9L RC1218JK-0762KL RC1218FK-07360RL RC2512FK-071R21L RC2512FK-072R61L RC2010FK-071R4L RC1218JK-07510KL RC2512FK-7W7R5L RC1218FK-07215KL RC2512FK-071M21L RC1210FR-071R07L RC1218FK-07165RL RC2512JK-7W3R9L RC1218FK-0730R1L RC1218JK-077R5L RC2512FK-7W44R2L RC1218FK-07316RL RC1210FR-07931RL RC1218FK-0759KL RC2010FK-078R06L RC1218FK-072K32L RC2512JK-7W6K2L RC2512FK-7W110RL RC1218FK-076R04L RC1218JK-07360RL RC2010FK-072R94L RC2010FK-074M64L RC2512FK-7W66R5L RC1218FK-07392RL RC2512JK-7W3R6L RC2010FK-076M8L RC1218FK-0780K6L RC2512FK-7W56RL RC1218FK-07887RL RC1218FK-071K21L RC2512FK-074M99L RC1218JK-0713KL RC2010FK-075R49L RC2010FK-073R32L RC1218FK-07845RL RC2010FK-072R1L RC1210FR-074R3L RC1218FK-07680KL RC1218JK-0724KL RC2512FK-076R65L RC1218JK-077K5L RC2512FK-074M7L RC1218FK-07124RL RC2512JK-7W4R3L RC2010FK-071M62L RC1210FR-075R11L RC1210JR-0720ML RC1218FK-072K49L RC1210FR-079R76L RC2010FK-071M3L RC2512JK-7W2R7L RC2512FK-075R49L RC2512FK-073R83L RC1218FK-07210RL RC1218JK-07240KL RC1218FK-0721R5L RC1218FK-0740R2L RC1218FK-0761K9L RC2512FK-074R02L RC2010FK-078R45L RC2512FK-077R68L RC2512FK-073R57L RC1218JK-07390KL RC1218FK-072K43L RC2512FK-7W40R2L RC1210FR-071R24L RC2010FK-072R05L RC1218FK-07215RL RC2512FK-7W120RL RC1218FK-07309RL RC1218FK-071K82L RC2512FK-073R65L RC2010FK-071R96L RC1218JK-076K2L RC2512FK-074M22L RC2512FK-7W22R1L RC2010FK-078R25L RC1218FK-076R81L RC1218JK-07430RL RC1218FK-071K07L RC1218FK-073K83L RC2512FK-7W14RL RC2010FK-073R57L RC2512FK-7W27RL RC2512FK-074M53L