MYRRA - EI 66-23 SERIE 44000 30 VA

EI 66-23 SERIE 44000 30 VA
Primary Voltage 117 V

Secondary Protection mA	Reference	Secondary Voltage V	Secondary Currant m A	No-load Voltage V	Ambient, Temperature C	Rating VA
315	44385	6	5000	6,9	T 50 B	30
315	44386	9	3333	10,3	T 50 B	30
315	44387	12	2500	13,8	T 50 B	30
315	44388	15	2000	17,2	T 50 B	30
315	44389	18	1667	20,8	T 50 B	30
315	44390	24	1250	27,7	T 50 B	30
315	44391	2 x 6	2 x 2500	2 x 6,9	T 50 B	30
315	44392	2 x 9	2 x 1667	2 x 10,3	T 50 B	30
315	44393	2 x 12	2 x 1250	2 x 13,8	T 50 B	30
315	44394	2 x 15	2 x 1000	2 x 17,2	T 50 B	30
315	44395	2 x 18	2 x 833	2 x 20,8	T 50 B	30
315	44396	2 x 24	2 x 625	2 x 27,7	T 50 B	30

EI 66-23 SERIE 44000 30 VA
Primary Voltage 117 V


Secondary Protection mA	Reference	Secondary Voltage V	Secondary Currant m A	No-load Voltage V	Ambient, Temperature C	Rating VA
160	44373	6	5000	6,9	T 50 B	30
160	44374	9	3333	10,3	T 50 B	30
160	44375	12	2500	13,8	T 50 B	30
160	44376	15	2000	17,2	T 50 B	30
160	44377	18	1667	20,8	T 50 B	30
160	44378	24	1250	27,7	T 50 B	30
160	44379	2 x 6	2 x 2500	2 x 6,9	T 50 B	30
160	44380	2 x 9	2 x 1667	2 x 10,3	T 50 B	30

Downloaded from Arrow.com.

160	44381	2 x 12	2 x 1250	2 x 13,8	T 50 B	30
160	44382	2 x 15	2 x 1000	2 x 17,2	T 50 B	30
160	44383	2 x 18	2 x 833	2 x 20,8	T 50 B	30
160	44384*	2 x 24	2 x 625	2 x 27,7	T 50 B	30

* Vacuum filling
* Two compartments bobbins
* Self-extinguishing plastics UL 94 VO
* Degree of protection IP 00
* 700 grams weight
* Resin class B CEI 85 (20 000h testing to CEI 126)
* Fuse protection on secondary side (see diagram) to be assumed by customer
* 30 V and 36 V model are VDE EN 60742 certified (production on request)
* Insulation voltage 4 KV
(6 KV MYRRA test)
* 100% tested production
* Certification : CCA procedure on request

* To be noted : 2 * 24 V model is non approved. Protection transformers according to EN 60742 circuit isolation tranformer.

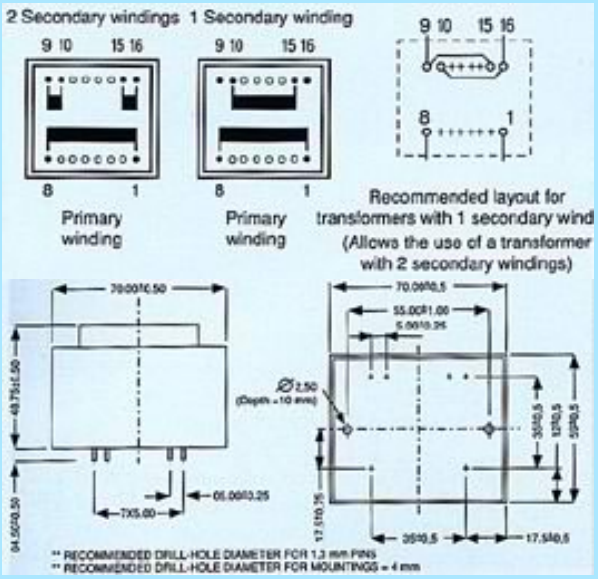

Downloaded from Arrow.com.