
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST
G	14

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	K1	REV PER ECR 06–001832	24APR06	JR	TM

AMP WIRE RANGE	Listed FILE E13288	LR7189 Certified
12–10 AWG SOLID OR STRANDED	12–10 AWG SOLID OR STRANDED	12–10 AWG SOLID OR STRANDED

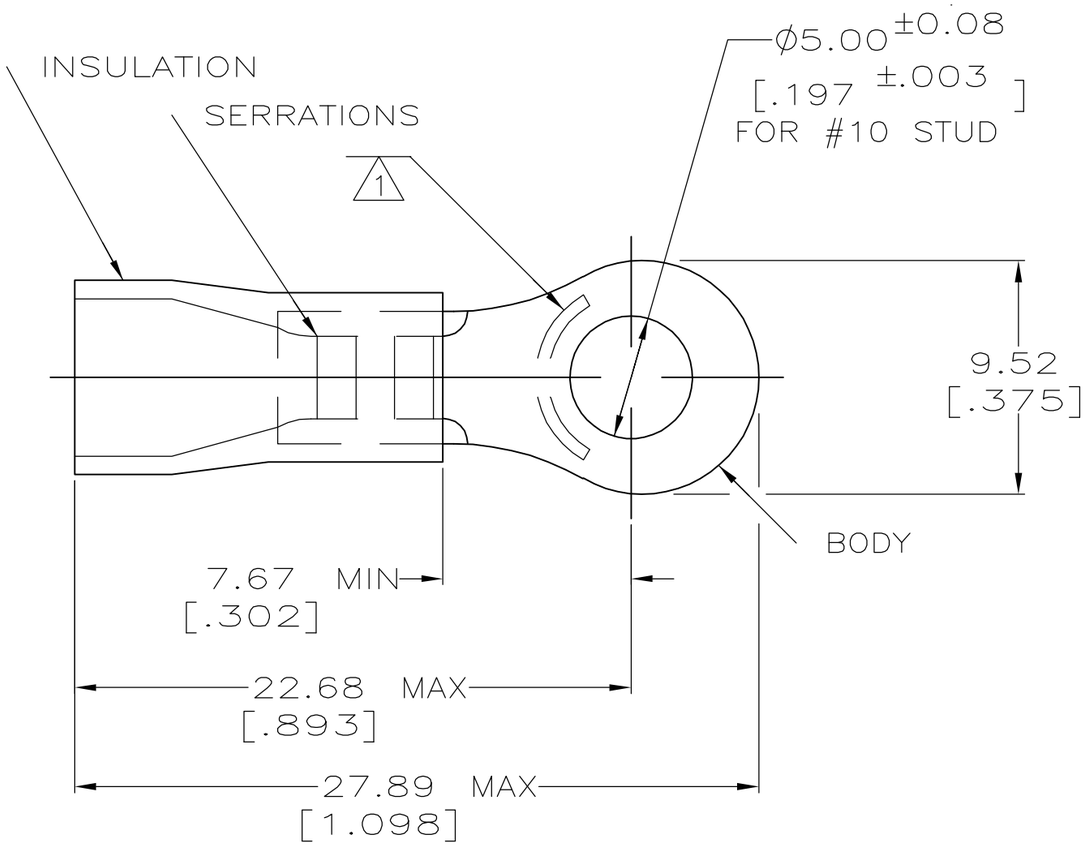

1. STAMP AMP 12–10* APPROX AS SHOWN
2. WIRE INSULATION DIA, .150–.250
3. TONGUE MATERIAL THK, 0.99±0.05[.039±.002]
4. MATERIAL: BODY – CU PER ASTM B152
   SLEEVE – PVC, COLOR – YELLOW

QTY	PACKAGE TYPE	PART NO.
25	LOOSE PC,BAG	8–34854–5
4	LOOSE PC,BLS	8–34854–4
100	LOOSE PC,BOX	8–34854–1
2500	ON TAPE, REEL	2–34854–1
–	LOOSE PIECE	34854

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1–800–522–6752
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1–800–722–1111
FOR ORDER ENTRY	1–800–526–5142

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

MAX RECOMMENDED OPERATING TEMPERATURE: 105°C [221°F]

VOLTAGE RATING: N/A

CIRCULAR MIL AREA: 2.62–6.64mm² [5,180–13,100] SOLID OR STRANDED

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± –
1 PLC	± –
2 PLC	± 0.20[.008]
3 PLC	± –
4 PLC	± –
ANGLES	± –

MATERIAL – 4

FINISH TIN PER ASTM B545

DWN	DK SCHRUM 08/06/92
CHK	RE HERSEY 11/10/92
APVD	M BARNABA 11/10/92
PRODUCT SPEC	108–1034
APPLICATION SPEC	NOT AVAILABLE
WEIGHT	–

tyco Electronics
Tyco Electronics Corporation
Harrisburg, Pa 17105–3608

NAME
TERMINAL, RING TONGUE, PLASTI–GRIP
WIRE SIZE: 12–10 AWG
–

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C–34854	–

CUSTOMER DRAWING

SCALE	SHEET	REV
4:1	1 OF 1	K1