
5mm x 20mm FUSE HOLDERS


SLIM LINE



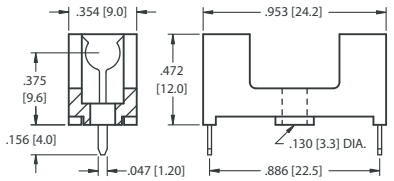

- Optional cover with window protects and insulates fuse
- Flame Retardant
- Not UL rated

Mounting Detail




CAT. NO. 4628 - **Holder**

CAT. NO. 4628C - **Cover only** (with window)

SPECIFICATIONS
Base & Cover: Nylon, UL Rated 94V-0
Clips: Brass, Tin Plate
Rated: 5 Amps @ 250V AC


LOW PROFILE



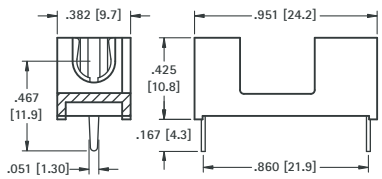

- Low profile, space saving design
- Optional cover protects and insulates fuse
- Flame Retardant
- Not UL rated

Mounting Detail




CAT. NO. 4527 - **Holder**

CAT. NO. 4527C - **Cover only**

SPECIFICATIONS
Base & Cover: Nylon, UL Rated 94V-0
Clips: Brass, Tin Plate
Rated: 5 Amps @ 250V AC


FULLY INSULATED



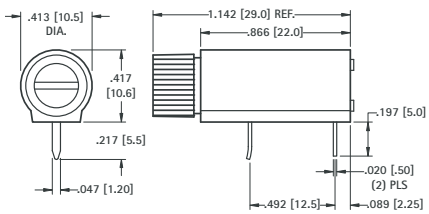

- Supplied unassembled
- Shock resistant
- Fuse can be accessed from board edge
- Fuse is completely enclosed, protecting use from shorting and breaking
- Not UL rated


Mounting Detail




CAT. NO. 4525

SPECIFICATIONS
Base: PBT
Contacts: Brass, Tin Plate
Rated: 10 Amps @ 250V AC


PC SNAP-IN



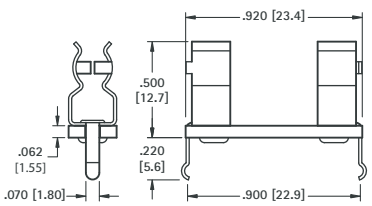

- Snap-in design for wave soldering
- Flame Retardant
- Optional cover protects and insulates fuse - Cat. No. 3527C

Mounting Detail




CAT. NO. 3527 - **Holder**

SPECIFICATIONS
Base: .062 (1.57) FR-4, UL Rated 94V-0
Clips: Brass, Tin Plate
UL Rated: 6.3 Amps @ 250V AC

3AG FUSE HOLDERS

TERMINATION LUGS CAN BE USED WITH WIRES OR PC MOUNT



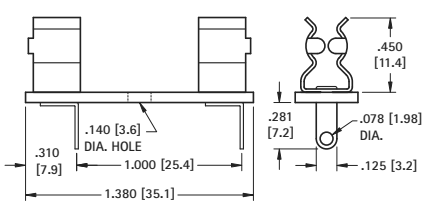


SPECIFICATIONS
Base: .062 (1.57) FR-4, UL Rated 94V-0
Clips: Brass, Tin Plate
UL Rated: 15 Amps @ 500VAC


CAT. NO. 3526


Optional cover available - Cat. No. 4245C

Mounting Detail



PRESS-FIT, IDEAL FOR WAVE SOLDERING



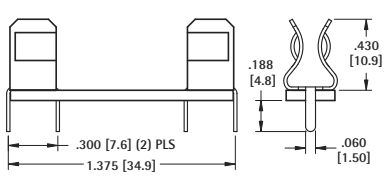


SPECIFICATIONS
Base: .062 (1.57) FR-4, UL Rated 94V-0
Clips: Brass, Tin Plate
UL Rated: 15 Amps @ 500VAC

CAT. NO. 4245


Optional cover available - Cat. No. 4245C

Mounting Detail



SNAP-IN DESIGN ASSURES STABILITY DURING WAVE SOLDERING



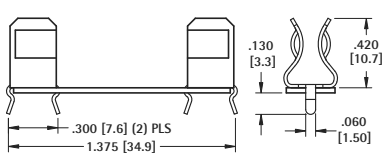


SPECIFICATIONS
Base: .032 (1.57) FR-4, UL Rated 94V-0
Clips: Brass, Tin Plate
UL Rated: 15 Amps @ 500VAC

CAT. NO. 4250


Optional cover available - Cat. No. 4245C

Mounting Detail



MOLDED CASE



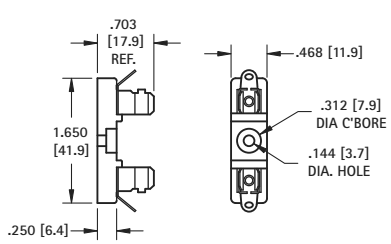

SPECIFICATIONS
Base: LCP, UL Rated 94V-0
Clips: .020 (.51) Brass - Nickel Plated
UL Rated: 15 Amps @ 250 VAC

CAT. NO. 3523

Optional cover available - Cat. No. 4245C

Mounting Hole: .144 (3.7) Dia.

Tel (718) 956-8900 • Fax (718) 956-9040
(800) 221-5510 • kec@keyelco.com
KEYSTONE®
RoHS COMPLIANT ~ ISO 9001 CERTIFIED
www.keyelco.com
31-07 20th Road – Astoria, NY 11105-2017