
THIS DRAWING IS A CONTROLLED DOCUMENT.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	C1	REDRAWN & REVISED PER ECO-17-013201	13SEP2017	RS	DR

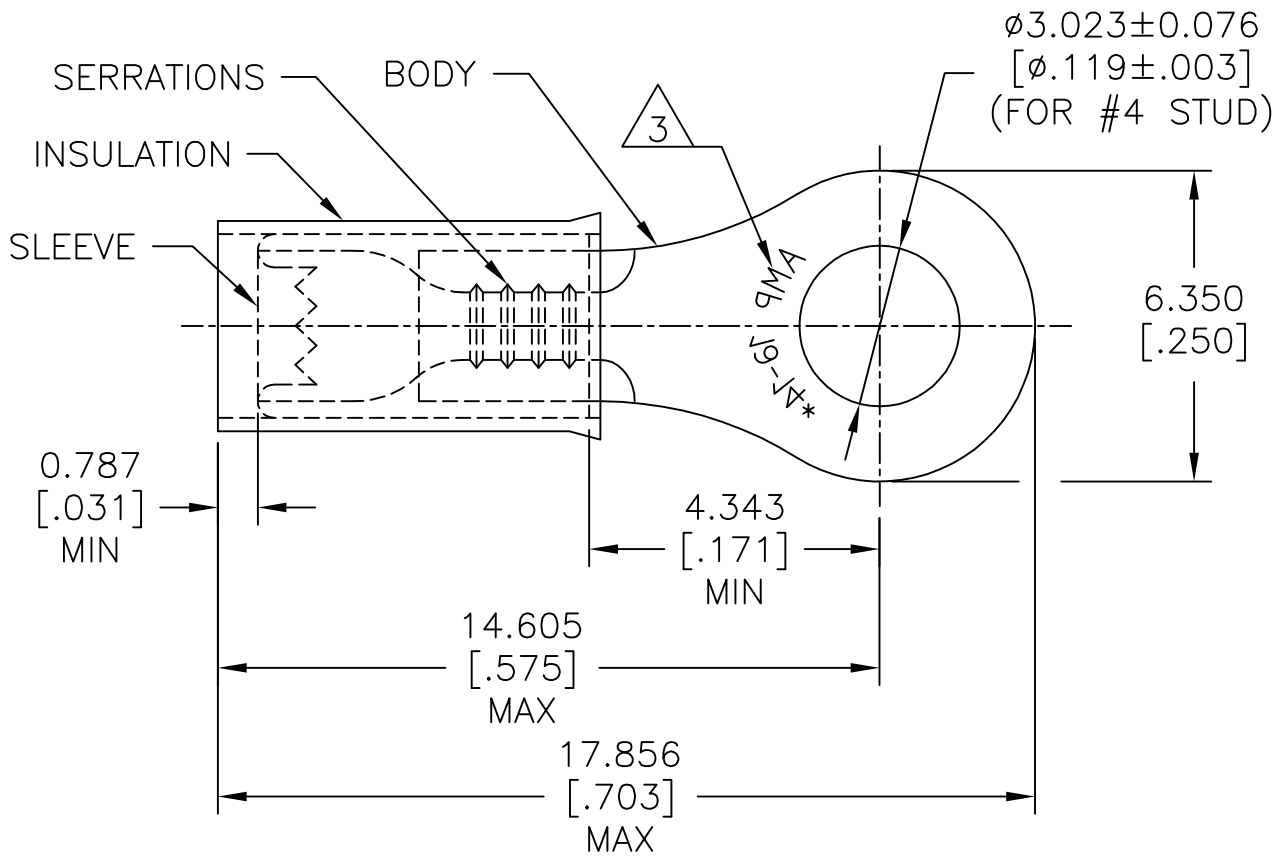

1 FOR 2.921[.115] TO 4.318[.170] WIRE INSULATION DIA, BODY MATERIAL THICKNESS: 0.787±0.051[.031±.002]

2 NOTE DELETED.

3 STAMP AMP 16-14* APPROX AS SHOWN.

QTY.	PACKAGE TYPE	MATERIAL & FINISH	PART NO
1000	LOOSE PIECE	BODY: COPPER (QQ-C-576) TIN PL(MIL-T-10727) SLEEVE: COPPER (QQ-C-576) INSULATION: PVC, COLOR: BLUE	32441

THIS DRAWING IS UNPUBLISHED. © COPYRIGHT - TE Connectivity ALL RIGHTS RESERVED. RELEASED FOR PUBLICATION -,- -

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± –
1 PLC	± –
2 PLC	± –
3 PLC	± 0.127[.005]
4 PLC	± –
ANGLES	± 5°

DWN RAVI S 13SEP2017
CHK ROHDE DANIEL F. 13SEP2017
APVD ROHDE DANIEL F. 13SEP2017
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT —

MATERIAL SEE TABLE
FINISH SEE TABLE

TE Connectivity

NAME WIRE TERMINAL, P.I.D.G. RING TONGUE, WIRE SIZE:16-14

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A4	00779	C-32441	—

CUSTOMER DRAWING | SCALE 2:1 | SHEET 1 OF 1 | REV C1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:
32441