

THIS DOCUMENT IS THE PROPERTY OF KEYSTONE ELECTRONICS CORP. AND SHALL NOT BE REPRODUCED, DISTRIBUTED OR USED AS A BASIS FOR MANUFACTURE WITHOUT PRIOR WRITTEN PERMISSION FROM KEYSTONE ELECTRONICS CORP.

PCB TRACE

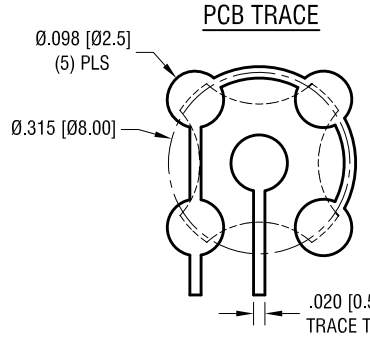


KEYPAD DOMES ARE DESIGNED
TO BE PLACED ON PCB, NOT SOLDERED

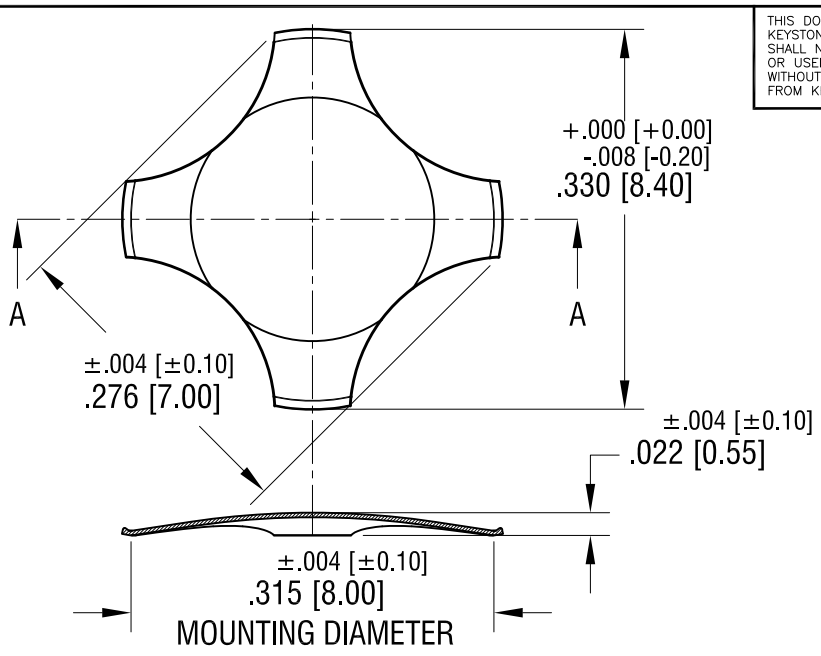

ACTUAL SIZE



SECTION A-A

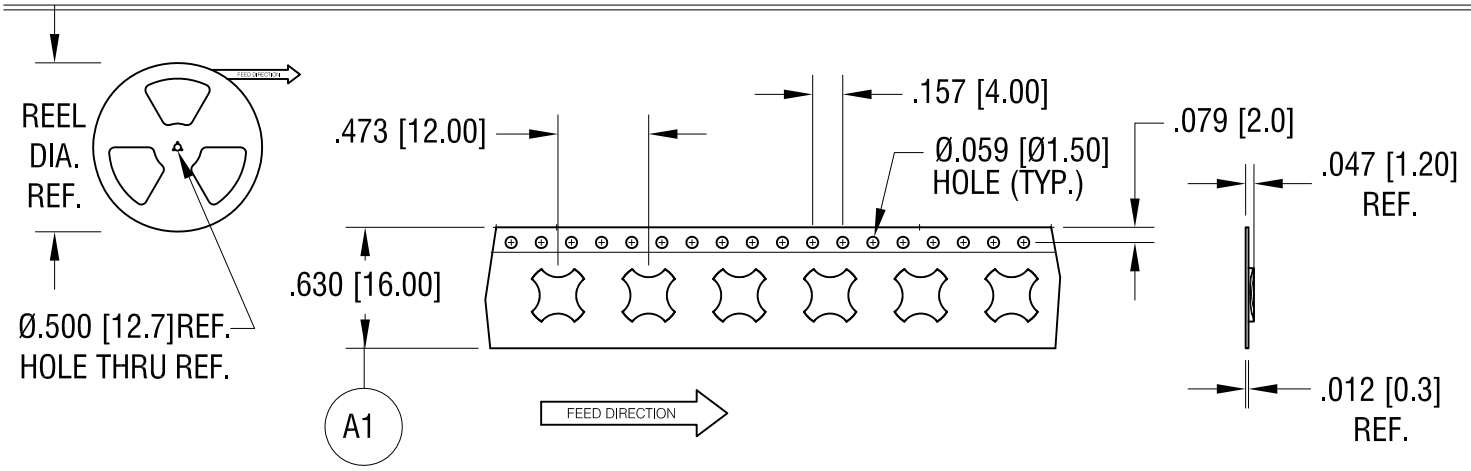

DOME SPECIFICATIONS:

1. VOLTAGE/CURRENT MAXIMUM: 12mA@ 24 Volts DC
2. OPERATING TEMPERATURE: -40°C TO 105°C
3. STORAGE TEMPERATURE: -55°C TO 125°C
4. MAT'L: .004 [0.10] STAINLESS STEEL
5. FINISH: NICKEL PLATE
6. TRIP FORCE: 400g

NOTES: SUPPLIED ON TAPE AND REEL ONLY

TAPE AND REEL SPECIFICATIONS:

1. TAPE:
   MAT'L - ALL CONDUCTIVE POLYSTYRENE CARRIER
   ANSI/EIA-481 STANDARD
2. REEL:
   13.0 [330.2] DIA. 5000 PIECES PER REEL

DATE	DESCRIPTION	REV.
5.13.22	(A1) WAS 24mm CHANGE AS PER ECR 22-069	A

KEYSTONE ELECTRONICS CORP.

www.keyelco.com ● NEW HYDE PARK NY 11040 ● Tel (516)328-7500

PART NAME: MINI 4 LEGS DOME			
MATERIAL: AS NOTED			
FINISH: AS NOTED	DRN BY: NT	DATE: 2.15.17	
	APP'D: RH	SCALE: 6X, 1X	
TOLERANCES INCH [MM] DECIMAL ± .005 [± 0.13] ANGULAR ± 1° UNLESS OTHERWISE SPECIFIED	CODE: C	DWG NO.: 5136TR	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Keystone Electronics:

5136TR