
Brand of NTN corporation

Technical data


6012EEC3


Single row deep groove ball bearings



Deep groove ball bearing, radial contact, pressed steel cage, contact seals on both sides

VISUAL (S)

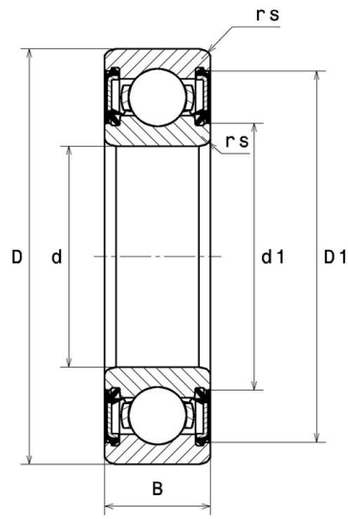

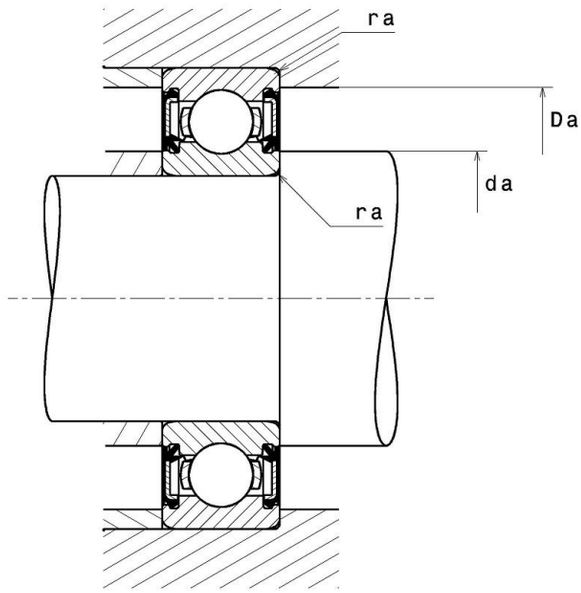

NTN Europe
1 rue des Usines · BP 2017 · 74010 Annecy Cedex · France · Tel. +33 (0)4 50 65 30 00
S.A. au capital de 322 639 919 € · RCS ANNECY B 325 821 072 · Id. Fiscale : FR 48 325 821 072
SIRET 325 821 072 00015 · Code APE 2815 Z · Code NACE 28.15

6012EEC3
Single row deep groove ball bearings

PRODUCT DEFINITION	
Brand	SNR
d - Internal diameter	60 mm
D - External diameter	95 mm
B - Bearing/Inner ring width	18 mm
d1 - External diameter inner ring	69,9 mm
D1 - Inner diameter outer ring	88,5 mm
rs - Min fillet radius	1,1 mm
Radial clearance class	C3
Mass	0,396 kg

PRODUCT PERFORMANCE	
C - Dynamic load	34 kN
C0 - Static load	24,7 kN
Cu - Fatigue limit load	1,12 kN
f0 - Coefficient	15.4
Nlim - Mechanical Limit Speed	4100 tr/min
Tmin - Min operating temperature	-30 °C
Tmax - Max operating temperature	120 °C

BEARING FREQUENCIES	
BPFO - Characteristic outer ring frequency (60 rpm)	5.586 Hz
BPFI - Characteristic inner ring frequency (60 rpm)	7.414 Hz
FTF - Characteristic cage frequency (60 rpm)	0.43 Hz
BSF - Characteristic rolling element frequency (60 rpm)	6.969 Hz

ABUTMENT

da min - Min shoulder diameter IR	66,5 mm
da max - Max shoulder diameter IR	69,9 mm
Da max - Max shoulder diameter OR	88,5 mm
ra max - Max shaft & housing fillet radius	1 mm

INDUSTRY CALCUL FACTORS

Equivalent dynamic radial load

P = X.Fr + Y.Fa

$\frac{f_0 F_a}{C_0}$	e	Fa / Fr ≤ e		Fa / Fr > e	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

Po = Xo.Fr + Yo.Fa

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement :

If Po <Fr, then use Po = Fr