Brand of NTN corporation

Technical data





609EE

Single row deep groove ball bearings

Deep groove ball bearing, radial contact, pressed steel cage, contact seals on both sides

VISUAL (S)

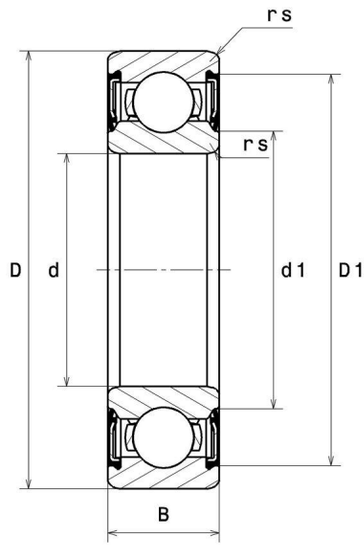

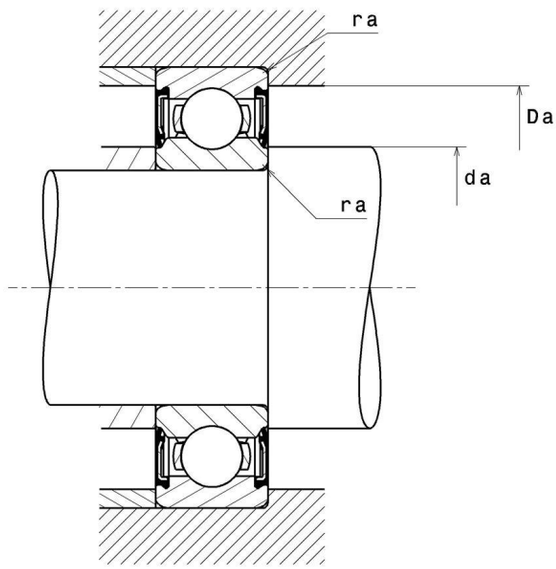

NTN Europe
1 rue des Usines · BP 2017 · 74010 Annecy Cedex · France · Tel. +33 (0)4 50 65 30 00
S.A. au capital de 322 639 919 € · RCS ANNECY B 325 821 072 · Id. Fiscale : FR 48 325 821 072
SIRET 325 821 072 00015 · Code APE 2815 Z · Code NACE 28.15

609EE
Single row deep groove ball bearings

PRODUCT DEFINITION	
Brand	SNR
d - Internal diameter	9 mm
D - External diameter	24 mm
B - Bearing/Inner ring width	7 mm
d1 - External diameter inner ring	12,8 mm
D1 - Inner diameter outer ring	20,3 mm
rs - Min fillet radius	0,3 mm
Radial clearance class	CN
Mass	0,014 kg

PRODUCT PERFORMANCE	
C - Dynamic load	3,5 kN
C0 - Static load	1,41 kN
Cu - Fatigue limit load	0,06 kN
f0 - Coefficient	12.8
Nlim - Mechanical Limit Speed	23000 tr/min
Tmin - Min operating temperature	-20 °C
Tmax - Max operating temperature	120 °C

BEARING FREQUENCIES	
BPFO - Characteristic outer ring frequency (60 rpm)	2.632 Hz
BPFI - Characteristic inner ring frequency (60 rpm)	4.368 Hz
FTF - Characteristic cage frequency (60 rpm)	0.376 Hz
BSF - Characteristic rolling element frequency (60 rpm)	3.783 Hz

609EE
Single row deep groove ball bearings

ABUTMENT	
da min - Min shoulder diameter IR	11 mm
da max - Max shoulder diameter IR	12,8 mm
Da max - Max shoulder diameter OR	22 mm
ra max - Max shaft & housing fillet radius	0,3 mm

INDUSTRY CALCUL FACTORS

Equivalent dynamic radial load

P = X.Fr + Y.Fa

$\frac{f_0 F_a}{C_0}$	e	Fa / Fr ≤ e		Fa / Fr > e	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

Po = Xo.Fr + Yo.Fa

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement :

If Po <Fr, then use Po = Fr