
39601000000 - 396 Series

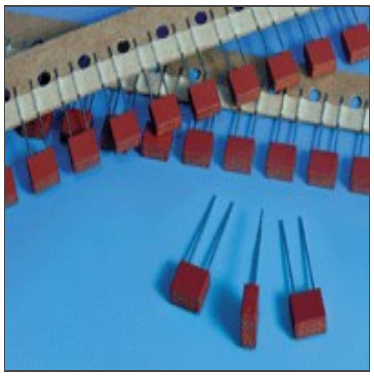

Series: 396

Questions? Contact Littelfuse Support

Fuse 396 Datasheet

Features:
- Lead free
- Reduced PCB space requirements
- Direct solderable or plug-in versions
- Internationally approved
- Low internal resistance
- Shocksafe casing
- Vibration resistance
- Halogen free

Click on part number below for individual TC curve files.

Check Stock

Order Samples





Feedback

Electrical Characteristics | Technical Resources | Environmental Info

Property (Mouseover for details)	Value
Ampere Rating (A)	0.1
Nominal Melting I^2T (A^2sec)	0.025
Interrupting Rating	100A@125VAC
Min Operating Temp °C	-40
Max Operating Temp (°C)	85
Moisture Sensitivity Level	MIL-STD-202 Method 106
Nominal Power Dissipation (W)	60
Nominal Voltage Drop (mV)	600
Nominal Cold Resistance (Ohms)	3.84
Opening	Slo-Blo/Time Lag (T)/Time Delay
Package Size	TE5 (8.5x8mm)
VAC (V)	125

Littelfuse, Inc. 8755 West Higgins Road Suite 500, Chicago, IL, A, 773-628-1000 Copyright © 2017 Littelfuse, Inc.