
GOOD-ARK
SEMICONDUCTOR

F1A thru F7A

Surface Mount Glass Passivated Standard Rectifier
Reverse Voltage 50~1000V Forward Current 1A

Features

- Glass passivated standard rectifiers
- Very low profile - typical height of 1.0 mm
- Low forward voltage drop
- Low leakage current
- Moisture sensitivity: level 1, per J-STD-020
- AEC-Q101 qualified
- High temperature soldering guaranteed: 260°C/10 seconds
- Halogen-free according to IEC 61249-2-21 definition



Package: eSGA (SOD-123FL)

RoHS COMPLIANT

Typical Applications

For use of general purpose rectification in lighting, cellular phones, portable devices, power supplies and other consumer applications.

Maximum Ratings (T_A=25°C unless otherwise specified)

Parameter	Symbol	F1A	F2A	F3A	F4A	F5A	F6A	F7A	Unit
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current at TL (See Fig.1)	$I_{F(AV)}$	1.0							A
Peak Forward Surge Current (8.3 ms single half sine-wave superimposed on rated load)	I_{FSM}	40							A
Operating Junction and Storage Temperature Range	T_J, T_{STG}	- 55 to + 150							°C

Electrical Characteristics (T_A=25°C unless otherwise specified)

Parameter	Test Conditions	Symbol	F1A	F2A	F3A	F4A	F5A	F6A	F7A	Unit
Maximum Instantaneous Forward Voltage	1 A	V_F	1.0							V
Maximum DC Reverse Current at rated DC Blocking Voltage	T_A=25°C T_A=125°C	I_R	5 50							μA
Typical Reverse Recovery Time	I_F=0.5A,I_R=1.0A, I_{rr}=0.25A	t_{rr}	1.8							uS
Typical Junction Capacitance	4.0 V, 1 MHz	C_J	6							pF
Typical Thermal Resistance[1)]	Juntion to Ambient	$R_{\theta JA}$	63							°C/W
	Juntion to Case	$R_{\theta JC}$	22							
	Juntion to Mount	$R_{\theta JM}$	2							

Note:1)The thermal resistance from junction to ambient,case or mount,mounted on P.C.B with 5×5mm copper pads,2 OZ,FR4 PC

Downloaded from Arrow.com.

Ratings and Characteristic Curves

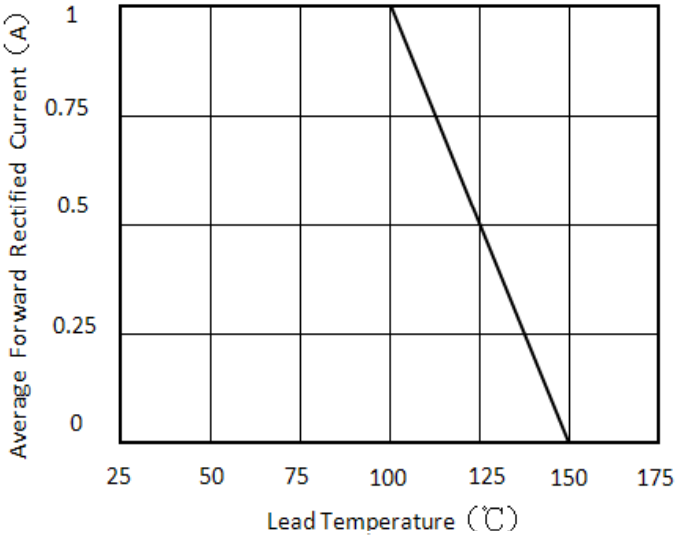


Figure 1.Forward Current Derating Curve

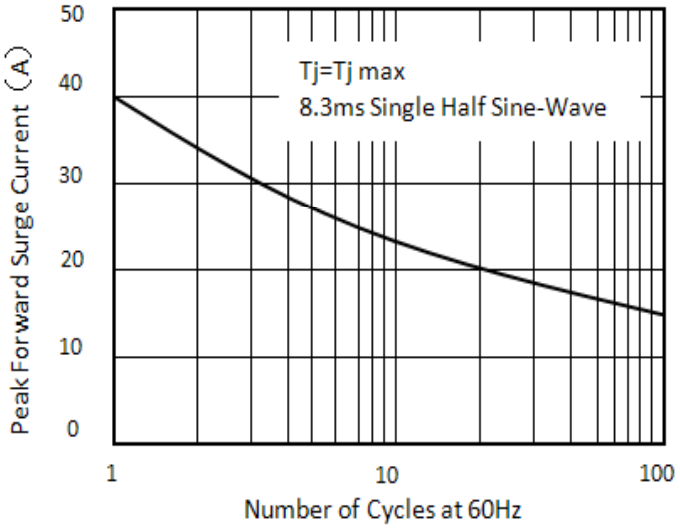


Figure 2.Maximum Non-Repetitive Peak Forward Surge Current

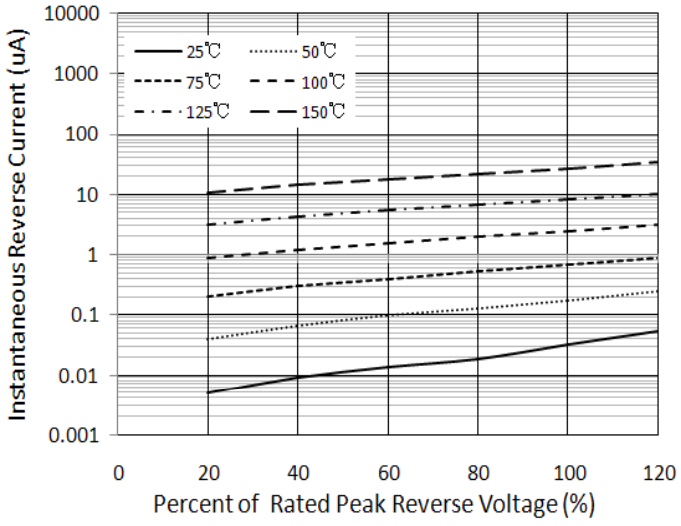


Figure 3. Typical Reverse Characteristics

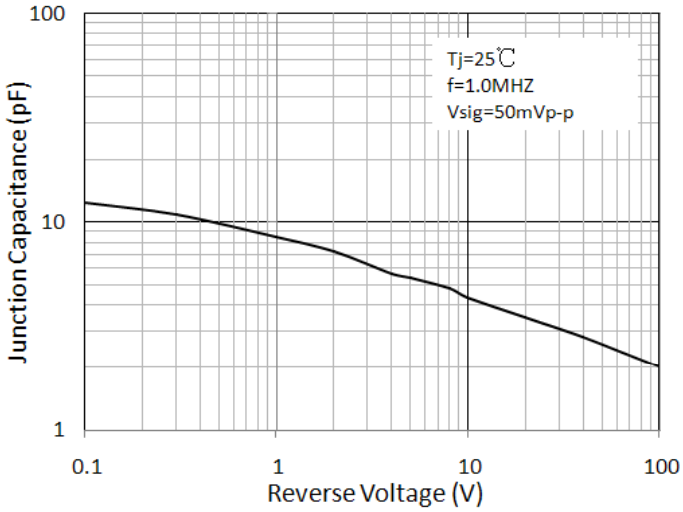


Figure 4. Typical Junction Capacitance

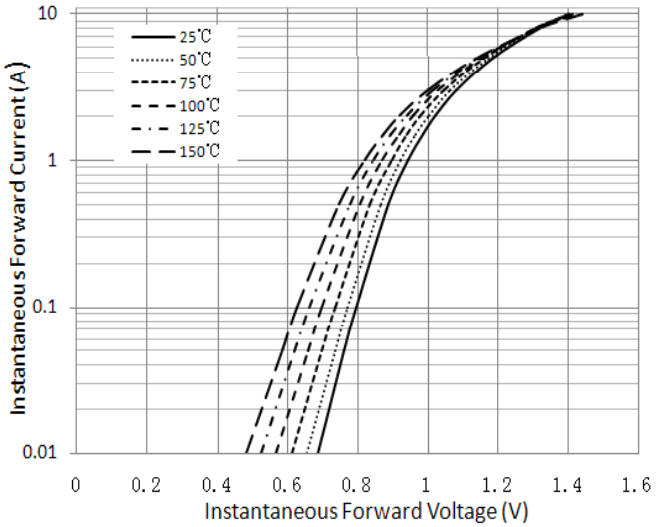


Figure 5. Typical Instantaneous Forward Characteristics


Downloaded from Arrow.com.

F1A thru F7A

Surface Mount Glass Passivated Standard Rectifier
Reverse Voltage 50~1000V Forward Current 1A


Package Outline Dimensions

eSGA (SOD-123FL)

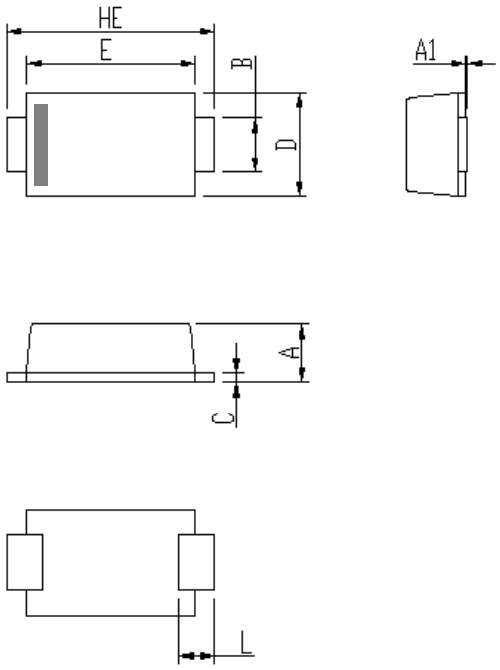

DIM	Unit: mm		Unit: inch	
	MIN	MAX	MIN	MAX
A	0.9	1.08	0.035	0.043
A1	0	0.1	0.000	0.004
B	0.85	1.05	0.033	0.041
C	0.1	0.25	0.004	0.010
D	1.7	2	0.067	0.079
E	2.9	3.1	0.114	0.122
L	0.43	0.83	0.017	0.033
HE	3.5	3.9	0.138	0.154

Soldering footprint




Packing Information

Packing quantities:

3000 pcs/Reel, 40 Reels/Box; 8mm Tape, 7" Reel

Tape & Reel Specification

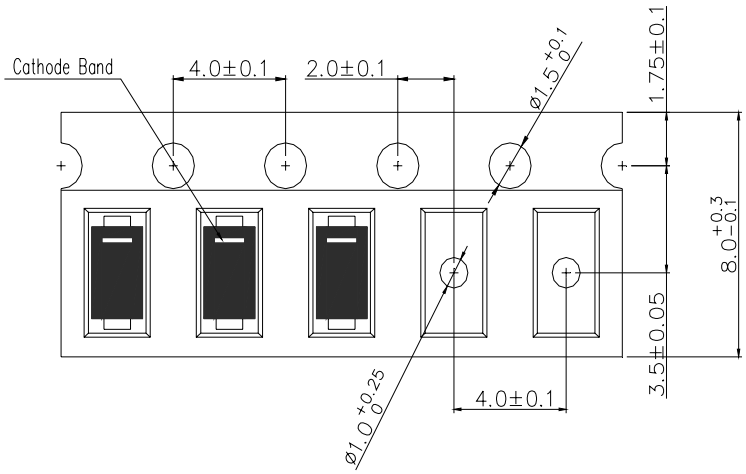

Downloaded from Arrow.com.