
© – TE Connectivity. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	G5	REVISED PER ECN–22–156403	03JUN2022	RK	CSD

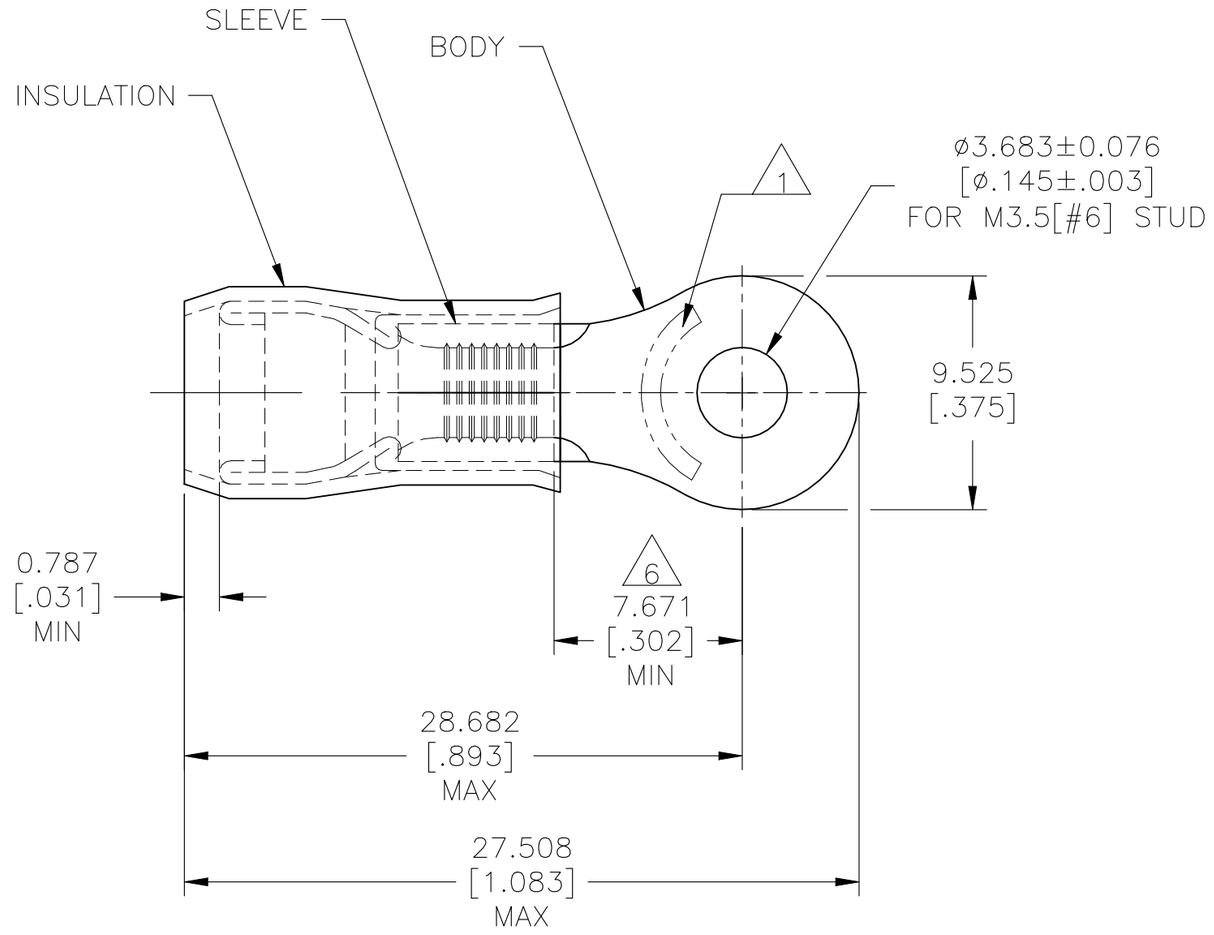

AMP WIRE RANGE	E13288 Listed	LR7189 Certified
12–10 AWG SOLID OR STRANDED	12–10 AWG SOLID OR STRANDED	12–10 AWG SOLID OR STRANDED

1. STAMP "AMP 12–10*" APPROX AS SHOWN
2. WIRE INSULATION: ø3.810–5.842[ø.150–.230]
3. BODY MATERIAL THK: 1.016±0.051[.040±.002]
4. BODY & SLEEVE: TIN PLATE 0.00254[.000100] MIN EXT THK PER ASTM B545
5. BODY & SLEEVE– CU PER ASTM B152
   INSULATION – NYLON PER ASTM D4066
   COLOR – YELLOW
6. APPLIES FROM EDGE OF METAL WIRE BARREL TO CENTER OF STUD HOLE.
7. MEETS MS25036–111, CLASS 1
8. NOTE DELETED

QTY	PACKAGE TYPE	PART NO
2500	ON TAPE & REEL	2–320567–2
500	LOOSE PIECE	7 320567

CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1–800–522–6752
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1–800–722–1111
FOR ORDER ENTRY	1–800–526–5142

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

MAX RECOMMENDED OPERATING TEMPERATURE: 105°C[221°F] MAX

VOLTAGE RATING: 300 VOLT MAX

CIRCULAR MIL AREA: 2.62–6.64mm² [5,180–13,100] STRANDED OR SOLID

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± 0.127[.005]
4 PLC ± –
ANGLES ± –

MATERIAL 5

FINISH 4

DWN	JR RUTH	16DEC09
CHK	T MICHIELUTTI	16DEC09
APVD	T MICHIELUTTI	16DEC09
PRODUCT SPEC	UL 486 A–B	
APPLICATION SPEC	114–2157	
WEIGHT	–	

TE Connectivity

NAME: TERMINAL, RING TONGUE, PIDG
WIRE SIZE: 12–10 AWG

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C–320567	–

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV G5

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

320567 MS25036-111