Resistors

Single-In-Line Conformal Coated Diode Array



D Series

- 4 to 14 Leads
- Standard and custom circuits
- Space saving design

NOT RECOMMENDED FOR NEW DESIGNS

RoHS All parts are Pb-free and comply with EU Directive 2011/65/EU amended by (EU) 2015/863 (RoHS3)

Specification

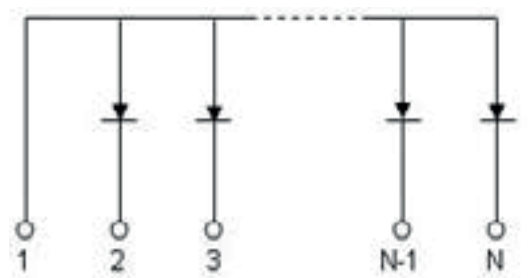
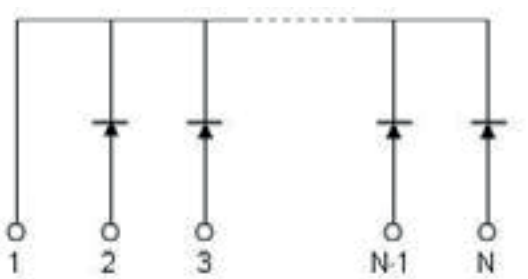
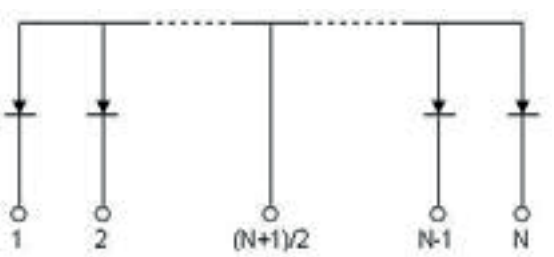
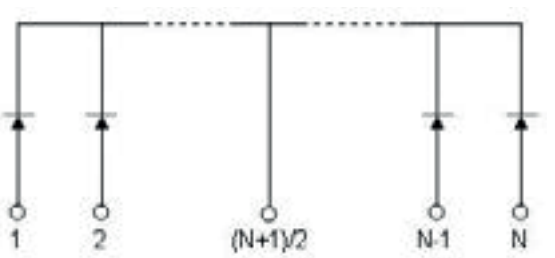
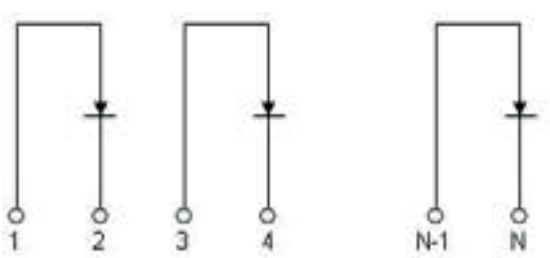
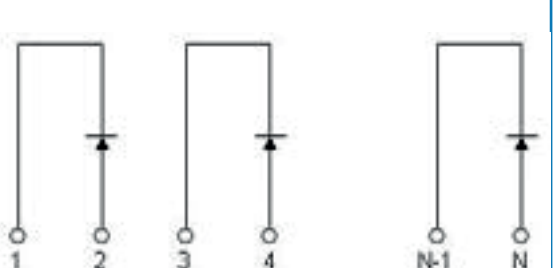
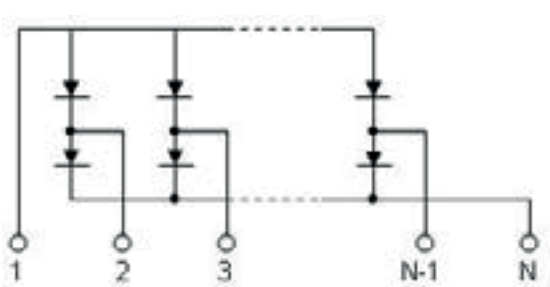
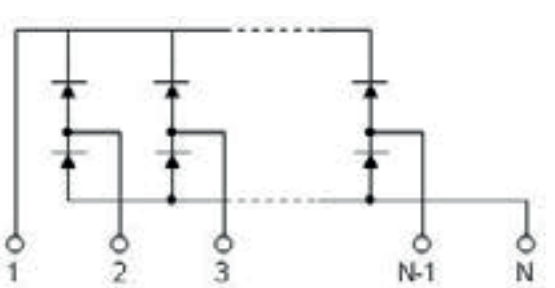
Reverse Voltage, V_R	80V
Reverse Current, I_R	1.0µA (V_R = 70V)
Forward Current, I_F	100mA Average, 300mA Surge (1µs Max.)
Forward Voltage, V_F	1.2V @ I_F = 100mA
Package Power, P_{PKG}	200mW @ 25°C
Reverse Recovery Time, t_{rr}	4ns (V_R = 6V, I_F = 5mA, R_L = 50Ω)
Capacitance, C	5.5pF (V_R = 6V, f = 1MHz)
Storage Temperature Range	- 55°C to 125°C
Operating Temperature Range	- 25°C to 80°C

General Note
TT Electronics reserves the right to make changes in product specification without notice or liability.
All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT Electronics plc

NOT RECOMMENDED FOR NEW DESIGNS

Specification

Circuit Type	Polarity "A"	Polarity "C"
1 N = 4 to 14		
2 N = 3 to 13 (Odd #)		
3 N = 4 to 14 (Even #)		
5 N = 4 to 14		

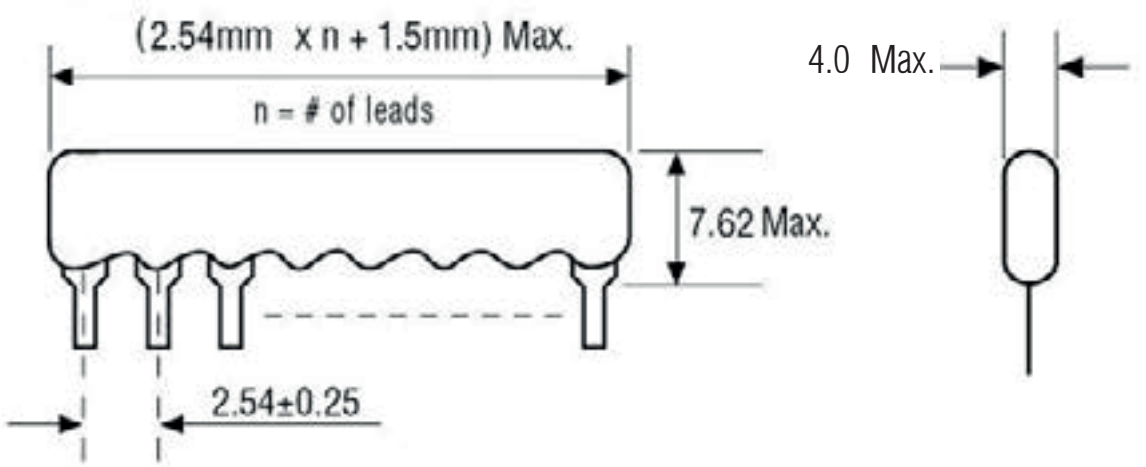
General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.
All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


© TT Electronics plc

NOT RECOMMENDED FOR NEW DESIGNS

Outline Dimensions (Inch/mm)



Typical Part Marking

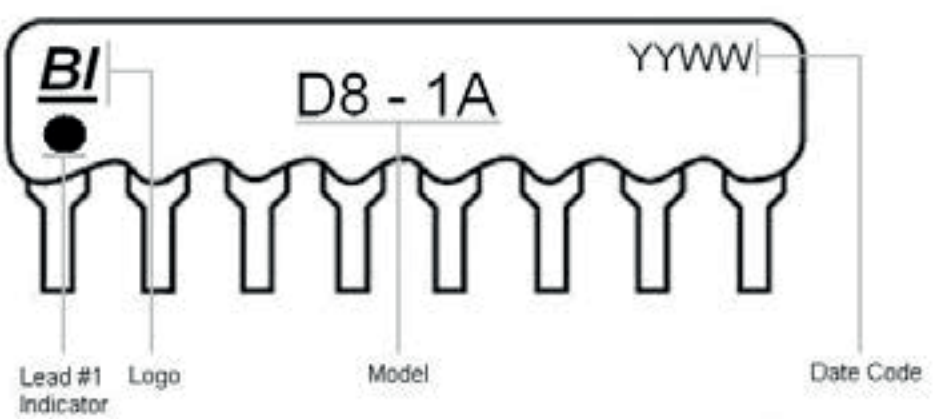

General Note
TT Electronics reserves the right to make changes in product specification without notice or liability.
All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT Electronics plc

NOT RECOMMENDED FOR NEW DESIGNS

Ordering Procedure

Example: D83C (Diode array with 8 pins, circuit 3 (isolated) with cathode at pin 1, Pb-free)

D	8		3	C
1	2		3	4

1 Series	2[1] Number of Pins	3[1] Circuit Type	4 Polarity	
D	4	1 = Bussed, pin 1 common	A	Anode at common pin (circuits 1 & 2) or at pin 1 (circuits 3 & 5)
	5	2 = Bussed, centre pin common		
	6	3 = Isolated	C	Cathode at common pin (circuits 1 & 2) or at pin 1 (circuits 3 & 5)
	7	5 = Dual termination		
	8			
	9			
	10			
	11			
	12			
	13			
	14			

Note 1 – see schematics for valid combinations of number of pins and circuit type.

General Note
TT Electronics reserves the right to make changes in product specification without notice or liability.
All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT Electronics plc