HIRSCHMANN® Test & Measurement
A BRAND OF SKS

SKS Kontakttechnik GmbH

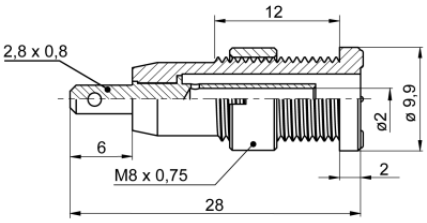
Sockets

MSEB 2610 F 2,8 Au



CE

2 mm safety system

Product	MSEB 2610 F 2,8 Au
description	Miniature safety built-in socket, 2mm diameter, gold-plated brass. Flat push-on Connection 2.8x0.8mm complying with DIN 46244. For installation into switch- panels and equipment Chassis till 8mm wall thickness. Installation hole: 8mm diameter
operating instruction	BA254
article-no. / *colour	9754557xx 00 black · 01 red · 02 blue · 03 yellow · 04 green · 05 brown · 06 gray · 07 white · 09 violet Au
drawing	
	
technical data	
connection	flat connector 2.8 x 0.8 mm
rated voltage	AC/DC 1000 V
measurement cat. acc. to IEC 61010	CAT III
rated current (consider derating curve)	10 A
material socket	brass, gold plated
housing material	PA
temperature range acc. To IEC61010[(1)]	-25 °C to +70 °C
inflammability class acc. to UL 94 (only valid for basic material of housing)	V-2

[(1)] contact the manufacturer for applications at deviating temperature ranges

stand: 21.06.2022

stand: 21.06.2022