
USB Connectors
Vertical Single Deck

156-UAS21-E

Date Last Revised: 01/10/23

DIMENSIONS: mm

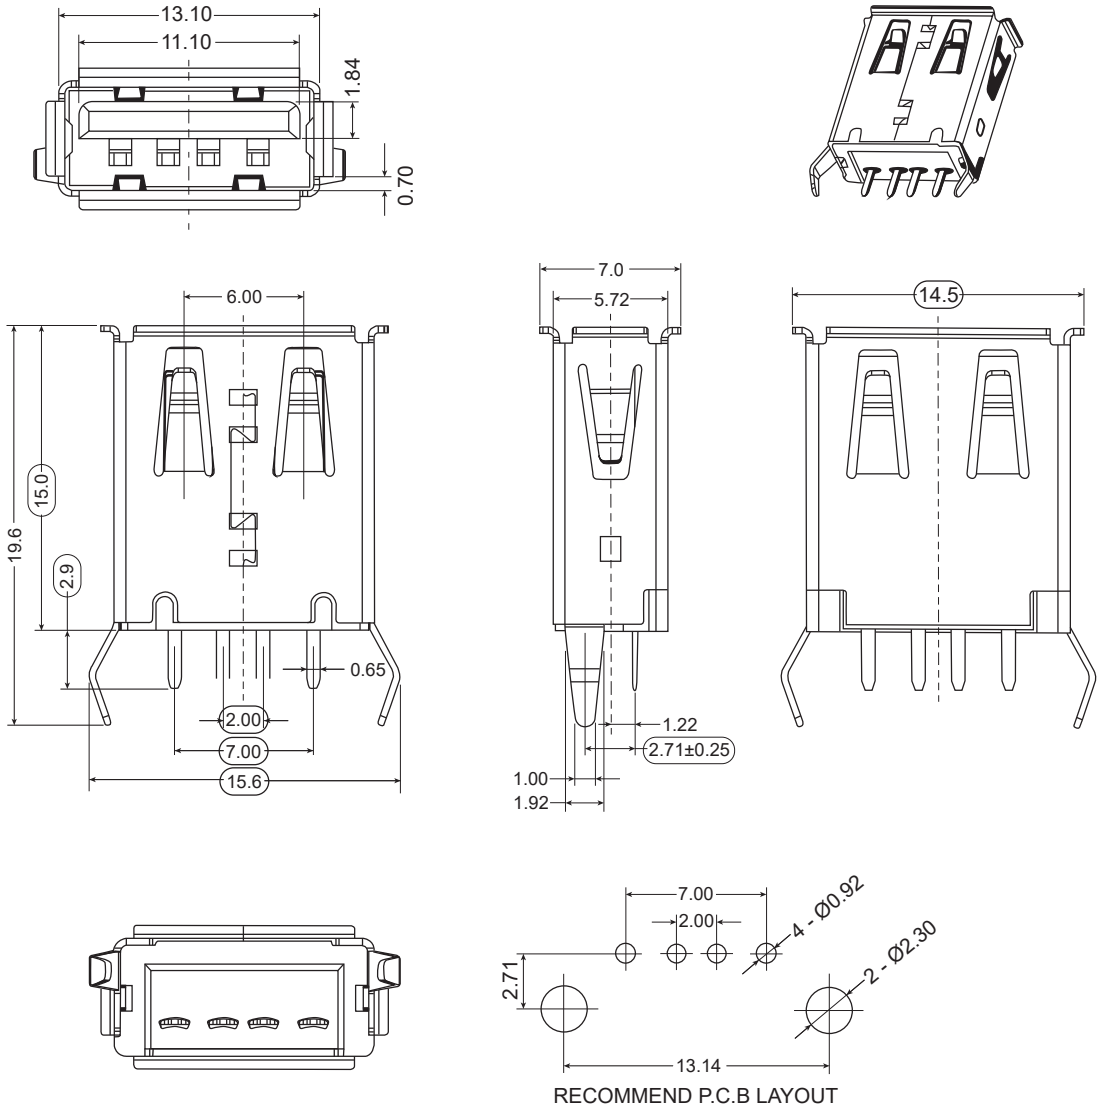

RECOMMEND P.C.B LAYOUT

SPECIFICATIONS:

- Voltage rating: 30VAC
- Current rating: 1.5A
- Temperature: -55°C to +85°C
- Contact resistance: 30mΩ Max.
- Insulation resistance: 1000MΩ Min.
- Dielectric withstand voltage: 500VAC
- Insulator Material: PBT white
- Sheet material: Brass
- Sheet plating: Nickel plating
- Contact Material: Brass
- Contact Area Plating(S): Gold flash

Note: RoHS Compliant

Available from Mouser Electronics
1-800-346-6873 / www.mouser.com

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Kobiconn:
156-UAS21-E