Datasheet

# Cable clamp for miniature connector

## SCM





**Part number :** SCM

**Product Description :** cable clamp for miniature connector

**Product Detail :** Stainless steel cable clamp for miniature thermocouple connector PROSENSOR, for secure fastening between cable and connector

## SPÉCIFICATIONS

| Attribut | Value |
|---|---|
| Accessory Type : | Thermocouple cable clamp |
| Using with : | Miniature connector thermocouple |
| Application : | Secure fastening between cable and connector |
| Connector size : | Miniature |

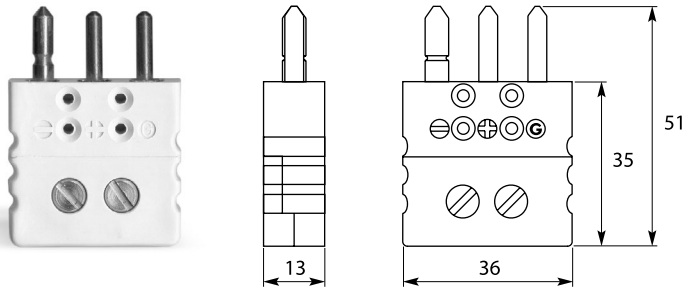
# RTD connectors

## *Pt100*

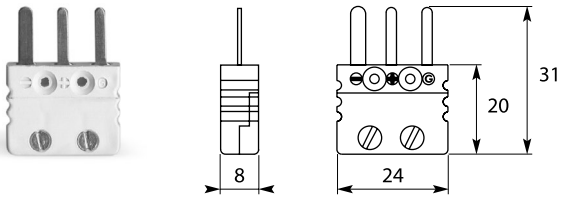
Material : fiberglass high temperature thermoplastic , 200°C, Easy wire connection, Polarized sign evoid connection mistake, 3 copper contacts .
Standard version accepts wires from 0,2 to 2,0 mm.
Maximum cable diameter 8 mm.

Miniature version accepts wires up to 0,6 mm
Maximum cable diameter 4,5 mm

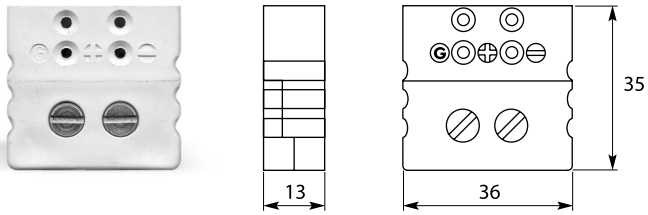
*Male Standard Connector* **Ref. SMPT100**



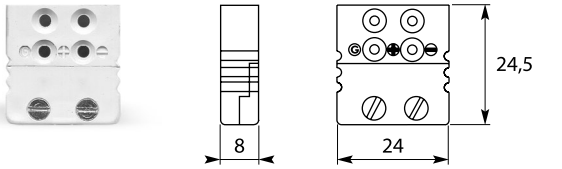

*Male Miniature Connector* **Ref. MMPT100**



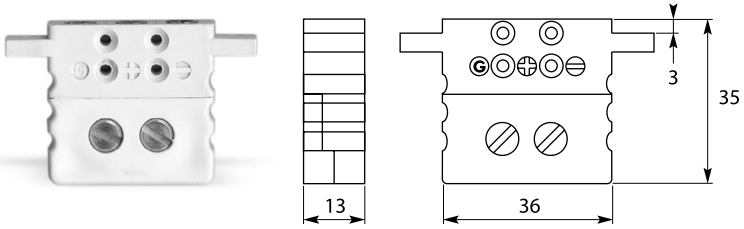

*Female Standard Connector* **Ref. SFPT100**



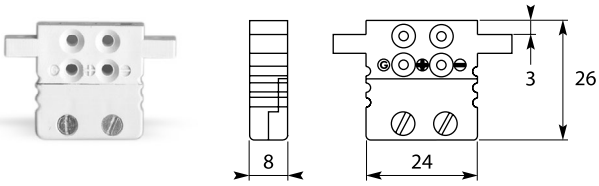

*Female Miniature Connector* **Ref. MFPT100**




*Standard Panel Insert* **Ref. ESFPT100**




*Miniature Panel Insert* **Ref. EMFPT100**






**Ref. SCS**

*Cable clamp for standard connectors*



**Ref. SCM**

*Cable clamp for miniature connector*

# Thermometer

## *PT100 High Resolution*



**Ref. THPRO PT**

| | |
|---|---|
| Range : | -199,99 à 199,99 ° C |
| Resolution : | 0,01 ° C |
| Accuracy : | ± 0,2 ° C |
| Battery : | 3 x 1,5 volts AAA |
| Battery life : | 2000 hours |
| Sensor Type : | Pt100 |
| Display : | 10mm LCD |
| Size : | 25 x 56 x 128mm |
| Material : | ABS plastic includes Biomaster product protection |
| Guarantee : | 2 years |
| Measurement scale | Celsius / Fahrenheit |