

由 Autodesk 教育版产品制作

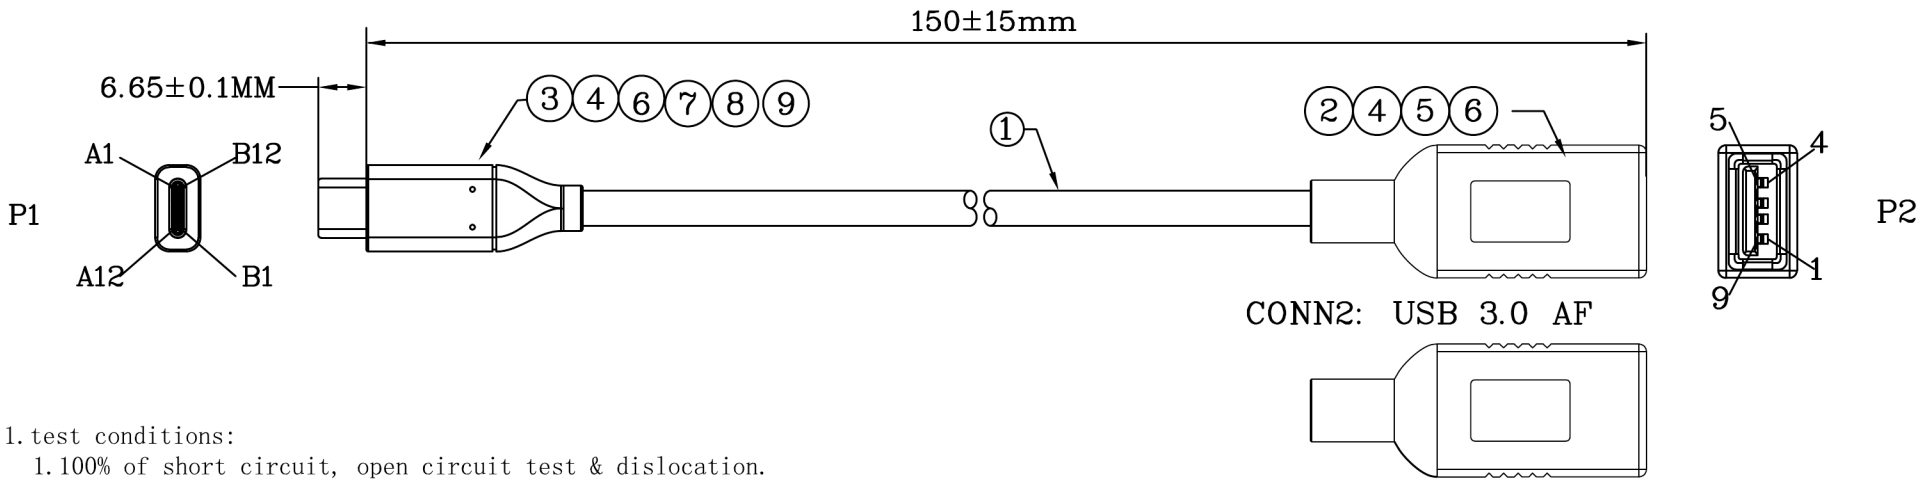

1. test conditions:
   1. 100% of short circuit, open circuit test & dislocation.
   2. Insulation impedance:100M ohm(MIN) DC 300V.
   3. Conduction impedance:2 ohm(MAX).
   4. Withstand voltage test:DC 300V/10ms
   5. Real machine test: A.)The measured C correct inverse identification of the hard disk
   B.)Measured traffic drives USB3.1 (read and write data in the above 300 MB/S)

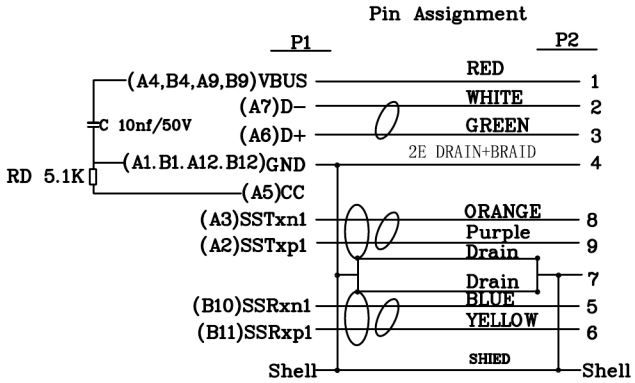

NO	ITEM	DESCRIPTION	Q'TY	UNIT
10	A0010207-00048	USB TYPE-C 小线夹(使用USB3.0插头端)材质：NY-66+15%GF，30+30+24AWG 规格：9.9*3.5*2.5MM	1	PCS
9	A0040411-00002	Low pressure molding compound, transparent color, hardness, 40 ~ 48 d	1	g
8	A0020100-00174	USB TYPE C~On the tin plating nickel to clamp (one)	1	PCS
7	A0020100-00175	USB TYPE C~The tin plating nickel to clamp (one)	1	PCS
6	A5-R047001	45P BLACK PVC ROHS	12	g
5	A5-R047011	transparent PE ROHS LDPE	4	g
4	A10-R075004	Heat shrinkable casing~∮2.0mm~black	0.035	M
3		TYPE C- Connector With~Empty PCB + patch ~ stick 5.1 K resistor ~ 10 n capacitance (plug nickel plating)	1	PCS
2	A2-R029039	USB3.0 (A)F Blue rubber core iron shell plating with iron sheathed nickel plating	1	PCS
1	A0010314-00062	USB3.1~[30AWG(7/0.1TC)+EAM]*2P+[32AWG(7/0.08TC)+A]*1P+23AWG(34/0.1TC)*1C+2E(7/0.16TC) +AB(16/10/0.08TC 85%)OD:4.2MM~Black PVC~No Marking	0.14	M

REV.	ECN	DESCRIPTION	DATE	NAME

TOLERANCE	INCHES	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

DRAWN BY	ZHOUWENLONG
CHECK BY	
APPD BY	

TITLE: **USB 3.1 CM TO USB 3.0 AF(5G/3A) CABLE L=0.15M**

CUSTOMER :	CPC		
CUSTOMER P/N:	PSG91481		
SCALE	NONE	DRAWING NO:	REV A01
UNIT	MM		
DATE	2017.05.02	C06026-00264	1/2

由 Autodesk 教育版产品制作
由 Autodesk 教育版产品制作
由 Autodesk 教育版产品制作