Innovative Service Around the Globe YAGEO

# DATA SHEET

## THIN FILM CHIP RESISTORS

### High precision - high stability

RT series

0.01% TO 1%, TCR 5 TO 50

**sizes 0201/0402/0603/0805/1206/ 1210/2010/2512**

**RoHS compliant**




YAGEO Phycomp

Product specification – April 21, 2020 V.12

## SCOPE

This specification describes RT series high precision - high stability chip resistors with lead-free terminations made by thin film process.

## APPLICATIONS

- Converters
- Printing equipment
- Server board
- Telecom
- Consumer

## FEATURES

- Halogen Free Epoxy
- RoHS compliant
- Reducing environmentally hazardous wastes
- High component and equipment reliability
- Saving of PCB space
- None forbidden-materials used in products/production

## ORDERING INFORMATION - GLOBAL PART NUMBER & I2NC

Both part numbers are identified by the series, size, tolerance, packing type, temperature coefficient, taping reel and resistance value.

**YAGEO BRAND ordering code**

**GLOBAL PART NUMBER (PREFERRED)**

| RT | XXXX | F | X | X | XX | XXXX | L |
|---|---|---|---|---|---|---|---|
| | (1) | (2) | (3) | (4) | (5) | (6) | (7) |

### (1) SIZE

0201/ 0402 / 0603 / 0805 / 1206 / 1210 / 2010 / 2512

### (2) TOLERANCE

L = ±0.01%
P = ±0.02%
W= ±0.05%
B = ±0.1%
C = ±0.25%
D = ±0.5%
F = ±1%

### (3) PACKAGING TYPE

R = Paper/PE taping reel K = Embossed taping reel

### (4) TEMPERATURE COEFFICIENT OF RESISTANCE

A = 5 ppm/°C
B = 10 ppm/°C
C = 15 ppm/°C
D = 25 ppm/°C
E = 50 ppm/°C

### (5) TAPING REEL

07 = 7 inch dia. Reel 10 = 10 inch dia. Reel 13 = 13 inch dia. Reel
7W= 7 inch dia. Reel with high power (1W for 2512)

### (6) RESISTANCE VALUE

There are 2~4 digits indicated the resistor value. Letter R/K/M is decimal point.
Detailed resistance rules show in table of "Resistance rule of global part number".

### (7) DEFAULT CODE

Letter L is system default code for order only (Note)

Resistance rule of global part number

| Resistance code rule | Example |
|---|---|
| XRXX (1 to 9.76 Ω) | 1R = 1 Ω<br>1R5 = 1.5 Ω<br>9R76 = 9.76 Ω |
| XXRX (10 to 97.6 Ω) | 10R = 10 Ω<br>97R6 = 97.6 Ω |
| XXXR (100 to 976 Ω) | 100R = 100 Ω |
| XKXX (1 to 9.76 KΩ) | 1K = 1,000 Ω<br>9K76 = 9760 Ω |
| XMXX (1 to 9.76 MΩ) | 1M = 1,000,000 Ω<br>9M76= 9,760,000 Ω |

### ORDERING EXAMPLE

The ordering code of a RT0603 chip resistor, TC 50 value 56 Ω with ±0.5% tolerance, supplied in 7-inch tape reel is: RT0603DRE0756RL.

### NOTE

1. All our RSMD products meet RoHS compliant and Halogen Free. "LFP" of the internal 2D reel label mentions "Lead Free Process"
2. On customized label, "LFP" or specific symbol can be printed

**PHYCOMP BRAND ordering codes**

Both GLOBAL PART NUMBER (preferred) and 12NC (traditional) codes are acceptable to order Phycomp brand products. For matching traditional types with size codes, please refer to "Comparison table of traditional types and sizes".

## GLOBAL PART NUMBER (PREFERRED)

For detailed information of GLOBAL PART NUMBER and ordering example, please refer to page 2.

## 12NC CODE

| 2390 | X | XX | X | XXXX | L |
|---|---|---|---|---|---|
| (1) | (2) | (3) | (4) | (5) | (6) |

| START WITH (1) | TCR (2) (ppm/°C) | PACKING CODE BY SIZE (inch) (3) | TOL. (4) (%) | RESISTANCE RANGE | DEFAULT CODE (NOTE) |
|---|---|---|---|---|---|
| 2390 | 8 = ±10 | 0402: 07 = 7" reel | 7 = ±1 | The remaining 4 digits represent the resistance value with the last digit indicating the multiplier as shown in the table of "Last digit of 12NC". | Letter L is system default code for order only (Note) |
| | 7 = ±15 | 47 = 13" reel | 6 = ±0.5 | | |
| | 6 = ±25 | 0603: 04 = 7" reel | 5 = ±0.25 | | |
| | 4 = ±50 | 24 = 10" reel | 4 = ±0.1 | | |
| | | 44 = 13" reel | 3 = ±0.05 | | |
| | | 0805: 01 = 7" reel | | 0402: 4.7Ω ≤ R ≤ 240KΩ | |
| | | 41 = 13" reel | | 0603: 1 Ω ≤ R ≤ 1MΩ | |
| | | 1206: 11 = 7" reel | | 0805: 1Ω ≤ R ≤ 1.5 MΩ | |
| | | 51 = 13" reel | | 1206: 1Ω ≤ R ≤ 1.5 MΩ | |
| | | 1210: 12 = 7" reel | | 1210: 4.7Ω ≤ R ≤ 1 MΩ | |
| | | 52 = 13" reel | | 2010: 4.7Ω ≤ R ≤ 1 MΩ | |
| | | 2010: 15 = 7" reel | | 2512: 4.7Ω ≤ R ≤ 1 MΩ | |
| | | 2512: 18 = 7" reel | | | |

Comparison table of traditional types and sizes

| TF (1) | X (2) | X (3) | X (4) |
|---|---|---|---|
| START WITH | SIZE CODE | TCR (ppm/°C) | TOL. (%) |
| TF | 3 = 0402 | 4 = ±10 | 0 = ±1 |
| | 2 = 0603 | 3 = ±15 | 1 = ±0.5 |
| | 1 = 0805 | 1 = ±25 | 2 = ±0.25 |
| | 0 = 1206 | 2 = ±50 | 3 = ±0.1 |
| | 5 = 1210 | | 4 = ±0.05 |
| | 7 = 2010 | | |
| | 6 = 2512 | | |

Example:

TF321 = RT0402, TC50, ±0.5% tolerance

| Resistance decade (3) | Last digit |
|---|---|
| 1 to 9.76 Ω | 8 |
| 10 to 97.6 Ω | 9 |
| 100 to 976 Ω | 1 |
| 1 to 9.76 kΩ | 2 |
| 10 to 97.6 kΩ | 3 |
| 100 to 976 kΩ | 4 |
| 1 to 9.76 MΩ | 5 |
| 10 to 97.6 MΩ | 6 |

Example: 1 Ω = 1008 or 108
33 kΩ = 3303 or 333
10 MΩ = 1006 or 106

Exceptions to above packing code definitions:

0805 TC50 with 1%, supplied in 13" reel, the packing code is 02.

0603 TC50 with 1%, supplied in 13" reel, the packing code is 03.

2512 TC15, in 7" reel, the packing code is 35.

2010 TC15, in 7" reel, the packing code is 31.

## ORDERING EXAMPLE

The ordering code of a TF221 resistor, TC50, value 56 Ω , with ±0.5% tolerance, supplied in tape of 5,000 units per reel is: 239040465609L or RT0603DRE0756RL.

**NOTE**

1. All our RSMD products meet RoHS compliant and Halogen Free. "LFP" of the internal 2D reel label mentions "Lead Free Process"
2. On customized label, "LFP" or specific symbol can be printed

## MARKING

RT0201 / RT0402 / RESISTANCE VALUE IS NOT IN E-24 / E96 SERIES




Fig. 4

No marking

RT0603




Fig. 2 Value = 56 kΩ

E-24 series: exception values 10/11/13/15/20/75 of E-24 series, one short bar under marking letter




Fig. 3 Value = 12.4 kΩ

E-96 series: including values 10/11/13/15/20/75 of E-24 series, 3 digits

RT0805 / RT1206 / RT1210 / RT2010 / RT2512




Fig. 1 Value = 10 kΩ

Either resistance in E-24 or E-96: 4 digits
First three digits for significant figure and 4th digit for number of zeros

For further marking information, please see special data sheet "Chip resistors marking".

## CONSTRUCTION

The resistors are constructed out of a high-grade ceramic body. Internal metal electrodes are added at each end and connected by a resistive layer. The resistive layer is adjusted to give the approximate required resistance and laser cutting of this resistive layer that achieves tolerance trims the value. The resistive layer is covered with a protective coat and printed with the resistance value. Finally, the two external terminations (matte tin) are added. See fig. 5.

## DIMENSION

Table 1 For outlines see fig. 5

| TYPE | L (mm) | W (mm) | H (mm) | $l_1$ (mm) | $l_2$ (mm) |
|---|---|---|---|---|---|
| RT0201 | 0.60 ±0.03 | 0.30 ±0.03 | 0.23 ±0.03 | 0.10 ±0.05 | 0.15 ±0.05 |
| RT0402 | 1.00 ±0.10 | 0.50 ±0.05 | 0.30 ±0.05 | 0.20 ±0.10 | 0.25 ±0.10 |
| RT0603 | 1.60 ±0.10 | 0.80 ±0.10 | 0.45 ±0.10 | 0.25 ±0.15 | 0.25 ±0.15 |
| RT0805 | 2.00 ±0.10 | 1.25 ±0.10 | 0.50 ±0.10 | 0.35 ±0.20 | 0.35 ±0.20 |
| RT1206 | 3.10 ±0.10 | 1.60 ±0.10 | 0.55 ±0.10 | 0.45 ±0.20 | 0.40 ±0.20 |
| RT1210 | 3.10 ±0.10 | 2.60 ±0.15 | 0.55 ±0.10 | 0.50 ±0.20 | 0.50 ±0.20 |
| RT2010 | 5.00 ±0.10 | 2.50 ±0.15 | 0.55 ±0.10 | 0.60 ±0.20 | 0.50 ±0.20 |
| RT2512 | 6.35 ±0.10 | 3.20 ±0.15 | 0.55 ±0.10 | 0.60 ±0.20 | 0.50 ±0.20 |

## OUTLINES

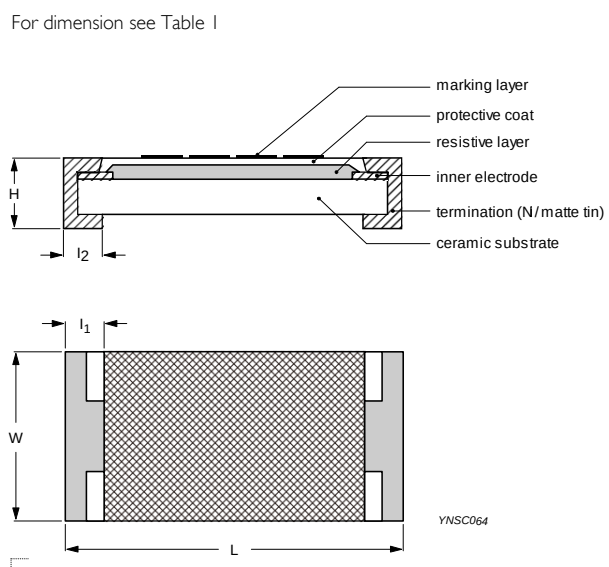



Fig. 5 Chip resistor outlines

## ELECTRICAL CHARACTERISTICS

Table 2

| TYPE | Operating Temperature Range | Power Rating | Max. Work Vol. (1) | Max. Overload Vol. | Dielectric Withstand Vol. | T.C.R. (ppm/°C) | Resistance Range (E-24/E-96 series)(2) & Tolerance | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | ±0.01% | ±0.02% | ±0.05% | ±0.1% | ±0.25% | ±0.5% | ±1.0% |
| RT0201 | –55°C to +125°C | 1/20W | 25V | 50V | 50V | ±50 | --- | --- | --- | 22~75K | 22~75K | 22~75K | 22~75K |
| | | | | | | ±25 | --- | --- | --- | 22~75K | 22~75K | 22~75K | 22~75K |
| | | | | | | ±15 | --- | --- | --- | 22~5K | 22~5K | --- | --- |
| | | | | | | ±10 | --- | --- | --- | 22~5K | 22~5K | --- | --- |
| | | | | | | ±5 | --- | --- | --- | --- | --- | --- | --- |
| RT0402 | | 1/16W | 50V | 100V | 75V | ±50 | 50.1~12K | 50.1~12K | 20~12K | 4.7~240K | 4.7~240K | 4.7~240K | 4.7~240K |
| | | | | | | ±25 | 50.1~12K | 50.1~12K | 20~12K | 4.7~240K | 4.7~240K | 4.7~240K | 4.7~240K |
| | | | | | | ±15 | 20~12K | 20~12K | 20~12K | 20~200K | 20~200K | --- | --- |
| | | | | | | ±10 | 20~12K | 20~12K | 20~12K | 20~200K | 20~200K | --- | --- |
| | | | | | | ±5 | 20~10K | 20~10K | 20~10K | 20~10K | 20~10K | --- | --- |
| RT0603 | | 1/10W | 75V | 150V | 100V | ±50 | 50.1~30K | 50.1~30K | 4.7~100K | 1~1M | 1~1M | 1~1M | 1~1M |
| | | | | | | ±25 | 50.1~30K | 50.1~30K | 4.7~100K | 1~1M | 1~1M | 1~1M | 1~1M |
| | | | | | | ±15 | 50.1~100K | 50.1~100K | 4.7~100K | 4.7~680K | 4.7~680K | --- | --- |
| | | | | | | ±10 | 50.1~100K | 50.1~100K | 4.7~100K | 4.7~680K | 4.7~680K | --- | --- |
| | | | | | | ±5 | 20~30K | 20~30K | 20~30K | 20~30K | 20~30K | --- | --- |
| RT0805 | | 1/8W | 150V | 300V | 200V | ±50 | 50.1~30K | 50.1~30K | 4.7~200K | 1~1.5M | 1~1.5M | 1~1.5M | 1~1.5M |
| | | | | | | ±25 | 50.1~30K | 50.1~30K | 4.7~200K | 1~1.5M | 1~1.5M | 1~1.5M | 1~1.5M |
| | | | | | | ±15 | 50.1~200K | 50.1~200K | 4.7~200K | 4.7~1M | 4.7~1M | --- | --- |
| | | | | | | ±10 | 50.1~200K | 50.1~200K | 4.7~200K | 4.7~1M | 4.7~1M | --- | --- |
| | | | | | | ±5 | 20~50K | 20~50K | 20~50K | 20~50K | 20~50K | --- | --- |
| RT1206 | | 1/4W | 200V | 400V | 300V | ±50 | 50.1~30K | 50.1~30K | 5.6~500K | 1~1.5M | 1~1.5M | 1~1.5M | 1~1.5M |
| | | | | | | ±25 | 50.1~30K | 50.1~30K | 5.6~500K | 1~1.5M | 1~1.5M | 1~1.5M | 1~1.5M |
| | | | | | | ±15 | 50.1~500K | 50.1~500K | 5.6~500K | 5.6~1.5M | 5.6~1.5M | --- | --- |
| | | | | | | ±10 | 50.1~500K | 50.1~500K | 5.6~500K | 5.6~1.5M | 5.6~1.5M | --- | --- |
| | | | | | | ±5 | 20~100K | 20~100K | 20~100K | 20~100K | 20~100K | --- | --- |
| RT1210 | | 1/4W | 200V | 400V | 400V | ±50 | --- | --- | 4.7~1M | 4.7~1M | 4.7~1M | 4.7~1M | 4.7~1M |
| | | | | | | ±25 | --- | --- | 4.7~1M | 4.7~1M | 4.7~1M | 4.7~1M | 4.7~1M |
| | | | | | | ±15 | --- | --- | 100~100K | 4.7~100K | 4.7~100K | --- | --- |
| | | | | | | ±10 | --- | --- | 100~100K | 4.7~100K | 4.7~100K | --- | --- |
| | | | | | | ±5 | --- | --- | --- | --- | --- | --- | --- |
| RT2010 | –55°C to +125°C | 1/2W | 200V | 400V | 400V | ±50 | --- | --- | 4.7~1M | 4.7~1M | 4.7~1M | 4.7~1M | 4.7~1M |
| | | | | | | ±25 | --- | --- | 4.7~1M | 4.7~1M | 4.7~1M | 4.7~1M | 4.7~1M |
| | | | | | | ±15 | --- | --- | 100~100K | 4.7~100K | 4.7~100K | --- | --- |
| | | | | | | ±10 | --- | --- | 100~100K | 4.7~100K | 4.7~100K | --- | --- |
| | | | | | | ±5 | --- | --- | --- | --- | --- | --- | --- |
| RT2512 | | 3/4W | 200V | 400V | 400V | ±50 | --- | --- | 4.7~1M | 4.7~1M | 4.7~1M | 4.7~1M | 4.7~1M |
| | | | | | | ±25 | --- | --- | 4.7~1M | 4.7~1M | 4.7~1M | 4.7~1M | 4.7~1M |
| | | | | | | ±15 | --- | --- | 100~100K | 4.7~100K | 4.7~100K | --- | --- |
| | | | | | | ±10 | --- | --- | 100~100K | 4.7~100K | 4.7~100K | --- | --- |
| | | | | | | ±5 | --- | --- | --- | --- | --- | --- | --- |
| | | 1W | 200V | 400V | 400V | ±50 | --- | --- | 10Ω~1M | 10Ω~1M | 10Ω~1M | 10Ω~1M | 10Ω~1M |
| | | | | | | ±25 | --- | --- | 10Ω~1M | 10Ω~1M | 10Ω~1M | 10Ω~1M | 10Ω~1M |

**NOTE**

1. The maximum working voltage that may be continuously applied to the resistor element, see "IEC publication 60115-8"
2. Value of E-192 series is on request

## FOOTPRINT AND SOLDERING PROFILES

For recommended footprint and soldering profiles, please see the special data sheet "Chip resistors mounting".

## PACKING STYLE AND PACKAGING QUANTITY

Table 3 Packing style and packaging quantity

| PACKING STYLE | REEL DIMENSION | RT0201 | RT0402 | RT0603 | RT0805 | RT1206 | RT1210 | RT2010 | RT2512 |
|---|---|---|---|---|---|---|---|---|---|
| Paper/PE taping reel (R) | 7" (178 mm) | 10,000 | 10,000 | 5,000 | 5,000 | 5,000 | 5,000 | --- | --- |
| | 10" (254 mm) | 20,000 | 20,000 | 10,000 | 10,000 | 10,000 | 10,000 | --- | --- |
| | 13" (330 mm) | 50,000 | 50,000 | 20,000 | 20,000 | 20,000 | 20,000 | --- | --- |
| Embossed taping reel (K) | 7" (178 mm) | --- | --- | --- | --- | --- | --- | 4,000 | 4,000 |

**NOTE**

1. For Paper/Embossed tape and reel specification/dimensions, please see the special data sheet "Chip resistors packing"

## FUNCTIONAL DESCRIPTION

### POWER RATING

Each type rated power at 70°C:
RT0201=1/20W, RT0402=1/16W, RT0603=1/10W, RT0805=1/8W, RT1206=1/4W, RT1210=1/4W, RT2010=1/2W, RT2512=3/4W, 1W

### RATED VOLTAGE

The DC or AC (rms) continuous working voltage corresponding to the rated power is determined by the following formula:

$V = \sqrt{(P \times R)}$

or max. working voltage whichever is less

Where

V=Continuous rated DC or AC (rms) working voltage (V)

P=Rated power (W)

R=Resistance value (Ω)

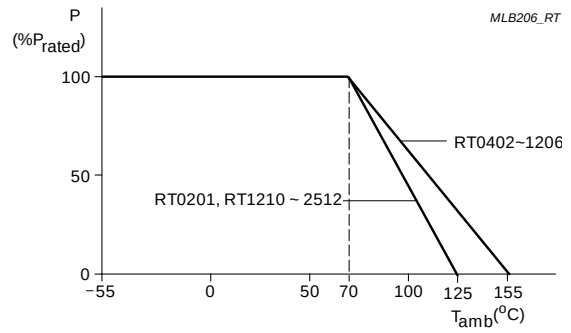



Fig. 6 Maximum dissipation (P) in percentage of rated power as a function of the operating ambient temperature ($T_{amb}$)

## TESTS AND REQUIREMENTS

Table 4 Test condition, procedure and requirements

| TEST | TEST METHOD | PROCEDURE | REQUIREMENTS |
|---|---|---|---|
| Temperature Coefficient of Resistance (T.C.R.) | MIL-STD-202 Method 304 | At +25/–55 °C and +25/+125 °C<br>**Formula:**<br>$T.C.R= \frac{R_2-R_1}{R_1(t_2-t_1)} \times 10^6$ (ppm/°C)<br>Where<br>$t_1$=+25 °C or specified room temperature<br>$t_2$=–55 °C or +125 °C test temperature<br>$R_1$=resistance at reference temperature in ohms<br>$R_2$=resistance at test temperature in ohms | Refer to table 2 |
| Life/Endurance | IEC 60115-1 4.25.1<br>MIL-STD-202 Method 108A | At 70±5 °C for 1,000 hours, RCWV applied for 1.5 hours on, 0.5 hour off, still air required | ±(0.5%+0.05 Ω) |
| High Temperature Exposure | IEC 60068-2-2 | 1000 hours at maximum operating temperature depending on specification, unpowered | ±(0.5%+0.05 Ω) |
| Moisture Resistance | MIL-STD-202 Method 106G | Each temperature / humidity cycle is defined at 8 hours, 3 cycles / 24 hours for 10d. with 25 °C / 65 °C 95% R.H, without steps 7a & 7b, unpowered<br>Parts mounted on test-boards, without condensation on parts<br>Measurement at 24±2 hours after test conclusion | ±(0.5%+0.05 Ω) |
| Thermal Shock | MIL-STD-202 Method 107G | -55/+125 °C<br>Number of cycles required is 300.<br>Devices mounted<br>Maximum transfer time is 20 seconds.<br>Dwell time is 15 minutes. Air – Air | ±(0.5%+0.05 Ω) for 10 KΩ to 10 MΩ<br>±(0.5%+0.05 Ω) for others |
| Humidity (steady state) | IEC 60115-1 4.24.2 | Steady state for 1000 hours at 40 °C / 95% R.H.<br>RCWV applied for 1.5 hours on and<br>0.5 hour off | ±(0.5%+0.05 Ω) |

| TEST | TEST METHOD | PROCEDURE | REQUIREMENTS |
|---|---|---|---|
| Short Time Overload | IEC60115-1 4.13 | 2.5 times of rated voltage or maximum overload voltage whichever is less for 5 sec at room temperature | ±(0.5%+0.05 Ω)<br>No visible damage |
| Board Flex/ Bending | IEC 60115-1 4.33 | Chips mounted on a 90mm glass epoxy resin PCB (FR4)<br>Bending: see table 6 for each size<br>Bending time: 60±5 seconds | ±(0.25%+0.05 Ω)<br>No visible damage |
| Insulation Resistance | IEC 60115-1 4.6 | Rated continuous overload voltage (RCOV) for 1 minute<br>Details see below table 5 | ≥10 GΩ |
| Dielectric Withstand Voltage | IEC 60115-1 4.7 | Maximum voltage ($V_{rms}$) applied for 1 minute | No breakdown or flashover |
| Solderability<br>- Wetting | J-STD-002 test B | Electrical Test not required<br>Magnification 50X<br>SMD conditions:<br>1st step: method B, aging 4 hours at 155°C dry heat<br>2nd step: leadfree solder bath at 245±3°C<br>Dipping time: 3±0.5 seconds | Well tinned (≥95% covered)<br>No visible damage |
| - Leaching | J-STD-002 test D | Leadfree solder, 260 °C, 30 seconds immersion time | No visible damage |
| - Resistance to Soldering Heat | IEC 60115-1 4.18 | Condition B, no pre-heat of samples.<br>Leadfree solder, 260 °C, 10 seconds immersion time<br>Procedure 2 for SMD: devices fluxed and cleaned with isopropanol | ±(0.5%+0.05 Ω)<br>No visible damage |

**Table 5** Criteria of rated continued working voltage and overload voltage

| TYPE | RT0201 | RT0402 | RT0603 | RT0805 | RT1206 | RT1210 | RT2010 | RT2512 |
|---|---|---|---|---|---|---|---|---|
| Voltage (DC/unit: V); (AC/ unit: $V_{rms}$) | 50 | 100 | 100 | 300 | 500 | 500 | 500 | 500 |

**Table 6** Bending for sizes 0201 to 2512

| TYPE | RT0201 | RT0402 | RT0603 | RT0805 | RT1206 | RT1210 | RT2010 | RT2512 |
|---|---|---|---|---|---|---|---|---|
| Specification (mm) | 5 | 5 | 3 | 3 | 2 | 2 | 2 | 2 |

## REVISION HISTORY

| REVISION | DATE | CHANGE NOTIFICATION | DESCRIPTION |
|---|---|---|---|
| Version 12 | Apr. 21, 2020 | - | - Modified resistance range |
| Version 11 | July 2, 2019 | - | - Add 1W for 2512 |
| Version 10 | Jun. 12, 2019 | - | - Extend resistor value |
| Version 9 | Sep. 12, 2017 | - | - Add ±0.02% tol. for 0402 to 1206 |
| Version 8 | May 31, 2017 | - | - Add 10" packing |
| Version 7 | Jan. 17, 2017 | - | - Add ±0.01% tol. for 0402 to 1206 |
| Version 6 | May. 11, 2015 | - | - Extend resistor value |
| Version 5 | Aug. 22, 2014 | - | - Add RT0201<br>- RT0402/0603/0805/1206: resistance range and operating temperature range updated<br>- Fig. 6 updated |
| Version 4 | Oct 21, 2009 | - | - Test Items and methods updated<br>- Test requirements upgraded |
| Version 3 | Jul 11, 2008 | - | - Change to dual brand datasheet that describe RT0402 to RT2512 with RoHS compliant<br>- Description of "Halogen Free Epoxy" added<br>- Define global part number<br>- Modify electrical characteristic |
| Version 2 | Dec 26, 2005 | - | - New datasheet for thin film high precision - high stability chip resistors sizes of 0201/0402/0603/0805/1206/1210/2010/2512, 1%, 0.5%, 0.25%, 0.1%, 0.05%, TC25/50 with lead-free terminations<br>- Replace the 0402 to 1210 parts of pdf files: TFx10_1_1, TFx11_.5_2, TFx12_.25_2, TFx13_.1_3, TFx14_.05_1, TFx20_1_2, TFx21_.5_2, TFx22_.25_2, TFx23_.1_2, TFx24_.05_1, and combine into a document.<br>- Test method and procedure updated<br>- PE tape added (paper tape will be replaced by PE tape) |

*" Yageo reserves all the rights for revising the content of this datasheet without further notification, as long as the products itself are unchanged. Any product change will be announced by PCN."*

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

YAGEO:

RT1206BRD07187KL RT1206BRD0719K1L RT1206BRD0723K2L RT1206BRD07402RL RT1206BRD076K65L
RT1206BRD0784K5L RT0603DRE07121RL RT1206BRD0717K4L RT0402CRD0756KL RT1206FRE07475RL
RT1206FRE07536KL RT1206FRE0790K9L RT1206FRE077K32L RT1206FRE07267KL RT1206FRE07255KL
RT1206FRE07191KL RT1206FRE07178RL RT1206FRE07267RL RT1206FRE073K65L RT1206FRE0713K3L
RT1206BRB0715KL RT1206BRD0722K6L RT0805FRE0746R4L RT0805FRE0731R6L RT1206FRD0710RL
RT1206CRE0749R9L RT1206FRE0714K7L RT1206BRD076K81L RT0603DRE07330KL RT0603FRE071R1L
RT0603DRD072K05L RT0603FRE0716R2L RT0603CRE0723K2L RT0603CRE07107KL RT0603CRD0719K6L
RT0603CRD0715KL RT0603CRD0712K1L RT0603CRD0710K5L RT0805CRD077K5L RT0805CRD07511RL
RT0805CRD07294RL RT0805CRD0728KL RT0805CRD072K49L RT0805CRD07140RL RT0805CRD0711K5L
RT0805CRD0756KL RT0805CRD0711K3L RT0805CRD071ML RT0805BRE079K31L RT0805BRE07270KL
RT0805BRE0726K1L RT0603FRE07549KL RT0805FRE0719K6L RT0805FRE07237KL RT0805FRE07255KL
RT0805FRE07267KL RT0805FRE0797K6L RT1206BRD07140RL RT1206BRD07604RL RT0603DRD076K65L
RT1206BRD07191RL RT0805FRE07316RL RT0603CRC073K9L RT1206FRE0711K8L RT1206FRE07169KL
RT1206FRE0723R7L RT1206FRE07130KL RT0603CRD073K74L RT0603FRE07232RL RT0603DRE0756K2L
RT1206BRD076K34L RT1206BRD077K32L RT0805BRB07464RL RT1206DRE071ML RT0603DRE0736K5L
RT0603DRE0738K3L RT1206DRD07300RL RT1206DRD07365KL RT1206DRE0712KL RT1206DRE071K47L
RT1206DRE07270KL RT1206DRE074K87L RT1206FRE07102KL RT1206FRE07102RL RT1206FRE07105KL
RT1206FRE07105RL RT1206FRE07107RL RT1206FRE0710K7L RT1206FRE0710R2L RT1206FRE0710R5L
RT1206FRE0710R7L RT1206FRE07113RL RT1206FRE07115RL RT1206FRE07118RL RT1206FRE0711K3L
RT1206FRE0711K5L RT1206FRE0711R3L RT1206FRE0711R5L RT1206FRE0711R8L RT1206FRE0711RL